

Pl 1081878

REC'L 24 OCT 2003

WIPO PCT

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

**UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office**

October 21, 2003

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A
FILING DATE.**

APPLICATION NUMBER: 60/424,116

FILING DATE: November 05, 2002

RELATED PCT APPLICATION NUMBER: PCT/US03/29776

**By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS**



N. Woodson
N. WOODSON
Certifying Officer

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

11/05/02
31057 U.S. PTO

11-07-02

6042 116 1104120V

Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No.

EV099083873US

INVENTOR(S)				
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)		
Ian A.	McCabe	Holland, Michigan		
<input type="checkbox"/> Additional Inventors are being named on the _____ separately numbered sheets attached hereto				
TITLE OF THE INVENTION (500 characters max)				
ELECTROCHROMIC MIRROR ASSEMBLY				
Direct all correspondence to: CORRESPONDENCE ADDRESS				
<input checked="" type="checkbox"/> Customer Number	28101	Place Customer Number Bar Code Label here		
OR				
<input type="checkbox"/> Firm or Individual Name				
Address				
Address				
City	State	ZIP		
Country	Telephone	Fax		
ENCLOSED APPLICATION PARTS (check all that apply)				
<input checked="" type="checkbox"/> Specification Number of Pages	38	<input type="checkbox"/> CD(s), Number		
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets	19	<input type="checkbox"/> Other (specify)		
<input checked="" type="checkbox"/> Application Data Sheet. See 37 CFR 1.76				
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT				
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.			FILING FEE AMOUNT (\$)	
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees				
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:	22-0190			\$160.00
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.				
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.				
<input checked="" type="checkbox"/> No				
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are: _____				

Respectfully submitted,

SIGNATURE

Timothy A. Flory

Date 11/05/2002

TYPED or PRINTED NAME Timothy A. Flory

TELEPHONE (616) 975-5500

REGISTRATION NO.
(if appropriate)
Docket Number:

42 540

DON01 P-1045

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

6042 116 110502

PATENT
DON01 P-1045
Express Mail No. EV099083873US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Ian A. McCabe

For : **ELECTROCHROMIC MIRROR ASSEMBLY**

Box Provisional Application
Commissioner for Patents
Washington, D.C. 20231


Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I certify that the attached return postcard; a check in the amount of \$160.00 for the filing fee; Provisional Application For Patent Cover Sheet (1 page, in duplicate); Patent Application Bibliographic Data Sheet (1 page); 38 pages of Specification; and 19 sheets of drawings are being deposited with the United States Postal Service as Express Mail in an envelope having Express Mail Label Number EV099083873US addressed to:

Box Provisional Application
Commissioner for Patents
Washington, D.C. 20231

on November 5, 2002.


Susan L. Gasper
Van Dyke, Gardner, Linn & Burkhart, LLP
2851 Charlevoix Drive, S.E.
P.O. Box 888695
Grand Rapids, MI 49588-8695
(616) 975-5500

TAF/slg
Enclosures

INVENTOR INFORMATION

6042 136 110502

Inventor One Given Name:: Ian A
Family Name:: McCabe
Postal Address Line One:: 16092 Ransom Street
City:: Holland
State or Province:: Michigan
Country:: US
Postal or Zip Code:: 49424
City of Residence:: Holland
State or Province of Residence:: Michigan
Country of Residence:: US
Citizenship Country:: Ireland

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 28101
Fax One:: (616) 975-5505
Electronic Mail One:: flory@vglb.com

APPLICATION INFORMATION

Title Line One:: ELECTROCHROMIC MIRROR ASSEMBLY
Total Drawing Sheets:: 19
Formal Drawings?:: No
Application Type:: Provisional
Docket Number:: DON01 P-1045
Secrecy Order in Parent Appl.?:: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 28101
Source:: PrintEFS Version 1.0.1

PROVISIONAL

DON01 P-1045

Express Mail No. EV099083873US

ELECTROCHROMIC MIRROR ASSEMBLYCROSS REFERENCE TO RELATED APPLICATION

The present application is related to U.S. provisional application, Ser. No. 60/412,275, filed Sep. 20, 2002 by McCabe for ELECTROCHROMIC MIRROR ASSEMBLY (Attorney Docket DON01 P-1011), which is hereby incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

The present invention relates to an electrochromic interior or exterior rearview mirror assembly for a vehicle and, more particularly, to an electrochromic rearview mirror assembly which provides transmission of display information through the electrochromic reflective element of the mirror assembly, while providing sufficient reflectance of the reflective element.

BACKGROUND OF THE INVENTION

Variable reflectivity mirror assemblies, such as electrochromic mirror assemblies are known and are widely implemented in vehicles. The reflective element of the mirror assemblies often include two substrates or glass elements. The back or outer surface of the second substrate (commonly referred to as the fourth surface of the reflective element) may include a silvered coating to provide reflectance of an image. In embodiments where the mirror assembly may include a display, a window may be formed, such as by sand blasting, laser etching or the like, through the silvered coating, such that display information may be transmitted through the window for viewing by the driver. The window provides a highly transmissive, generally spectrally neutral window for the display. However, the window defines an area of the reflective element that no longer has the reflective coating, such that reflectivity is lost in the window area. Therefore, the size and the quantity of displays that can be provided at the mirror reflective element is limited.

It is known to provide a metallic reflective layer on an inward surface of the second substrate of the electrochromic reflective element (commonly known in the art as a "third surface" of the reflective element), such as disclosed in U.S. Pat. No. 3,280,701, which is hereby incorporated herein by reference. An electrochromic medium may be positioned between the metallic layer and a transparent electrically conductive layer on the inward surface of the first substrate (i.e., the "second surface" of the reflective element). However,

there are concerns with the electrochromic medium of such mirror assemblies contacting the metallic layer, since chemical and/or electro-chemical attack on the metallic layer may result in corrosion of the metallic layer.

As disclosed in U.S. Pat. No. 5,724,187, a metallic conductive layer may be
5 disposed on the third surface, with a protective layer, such as a transparent semi-conductive layer of indium tin oxide, disposed on the metallic layer. The electrochromic medium is then positioned between the protective layer and a conductive layer on the inward surface of the first substrate. It is preferable for such designs to include an adhesion layer, such as a second transparent semi-conductive layer, such as indium tin oxide, or another metallic layer,
10 between the metallic layer and the inward surface of the second substrate, in order to enhance adhesion of the metallic layer to the second substrate.

In electrochromic mirror assemblies which include a display transmitting through the substrates of the reflective element, the metallic layer or coating must be thin enough to be transmissive to allow viewing of the display through the metallic coating. It is
15 known to provide a thinner metallic coating in a display area to provide increased transmissivity (but with a consequently reduced reflectivity) only in the display areas of the reflective element, such as disclosed in U.S. Pat. No. 6,356,376, which is hereby incorporated herein by reference. However, such designs have layers or coatings that are relatively thin (often less than 150Å or thereabouts in thickness) and so any variation in metallic layer
20 thickness may lead to a significant variation in light transmission through such thin metallic coatings. Thus, such significantly thin metallic coatings or layers may have a substantially low variability tolerance for the thickness and may require a substantially uniform thickness coating, in order to provide the desired results. Such tolerances and uniformity may be difficult to achieve through sputter coating or other coating processes typically used in the
25 manufacture of such reflective elements. Therefore, such significantly thin metallic coatings may be difficult and costly to manufacture.

An example of a known electrochromic reflective element is shown in FIG. 1. The reflective element includes an electrochromic (EC) medium layer and a metallic reflective layer sandwiched between conductive layers at the front and rear glass substrates.
30 A display is positioned at a rear surface of the rear substrate (the fourth surface of the reflective element). The display emits light through the substrates and layers therebetween so as to be viewable by a person viewing the first surface of the reflective element. Such known reflective elements provide little or no spectrally selective transmission characteristics of

visible light, as can be seen with reference to FIG. 1A, and may be subject to chemical/electrochemical corrosion through contact with the EC medium.

Therefore, there is a need in the art for an electrochromic mirror assembly which provides sufficient reflectivity and sufficient transmissivity to allow for transmission of display information through the reflective element, and which overcomes the above disadvantages and shortcomings of the prior art.

SUMMARY OF THE INVENTION

The present invention provides an electrochromic interior or exterior rearview mirror assembly which includes a third surface reflective element having a particular combination or stack of at least partially conductive layers (such as semi-conductive layers formed of at least partially conducting inorganic oxides, such as doped or undoped indium oxide, doped or undoped tin oxide, doped or undoped zinc oxide, doped or undoped nickel oxide, and/or doped or undoped tungsten oxide or the like) and metallic layer(s) at the third surface. The mirror assembly is suitable for including a display which emits and transmits viewable information through the reflective element of the mirror assembly. More particularly, the mirror assembly of the present invention is suitable for including a display on demand (DOD) type of display. The mirror assembly of the present invention provides a particular combination of reflector design or designs suitable for a display on demand type of display which are economical and which match and/or make most beneficial use of a particular light emitting display element and color thereof. The present invention thus provides a spectrally selective transmission of visible light characteristic to the reflective element of the mirror assembly, while maintaining a substantially non-spectrally selective, substantially untinted reflectant characteristic, and while maintaining a relatively high photopic reflectance, such as greater than approximately 60% photopic reflectivity, more preferably greater than approximately 70% photopic reflectivity, and most preferably greater than approximately 80% photopic reflectivity. The spectrally selective transmissivity of the reflective element may thus be selected or tuned to optimize transmission of a particular spectral band or range of light wavelengths at least primarily emitted by the display element.

According to an aspect of the present invention, an electrochromic mirror assembly for a vehicle comprises an electrochromic mirror element comprising a first substrate having first and second surfaces and a second substrate having third and fourth surfaces. The first and second substrates are arranged so that the second surface opposes the third surface with an electrochromic medium disposed therebetween. The third surface of the

second substrate comprises a transflective reflector comprising a first substantially transparent semi-conducting non-metallic layer contacting the electrochromic medium, a second substantially transparent semi-conducting non-metallic layer, and a substantially reflective metallic conducting layer sandwiched between (and electrically in contact/
5 connection with) the first and second substantially transparent semi-conducting non-metallic layers. When the mirror element is viewed from outside the first surface (such as by a driver or passenger within the vehicle), the mirror element is substantially spectrally untinted (i.e., is substantially spectrally unselective in photopic reflectivity) when no voltage is applied across the electrochromic medium. The mirror element is at least partially spectrally selective in
10 transmission (i.e., is at least partially tinted for transmittant light) and exhibits a spectrally selective transmission characteristic, which is established by the refractive indices and physical thicknesses of the first and second substantially transparent semi-conducting non-metallic layers and the substantially reflective metallic conducting layer. The mirror assembly includes a display disposed at the fourth surface of the second substrate which is
15 operable to emit light having an emitted spectral characteristic through the mirror element. The transflective reflector is configured to exhibit a spectrally selective transmission characteristic so as to substantially transmit light having a spectral band in regions at or near the emitted spectral characteristic and to substantially reflect other light.

In one form, the second substantially transparent semi-conducting non-metallic layer contacts the third surface of the second substrate. In another form, the
20 transflective reflector comprises two substantially reflective metallic conducting layers. Each of the two substantially reflective metallic conducting layers is sandwiched between a respective pair of substantially transparent semi-conducting non-metallic layers disposed between the electrochromic medium and the second substrate.

25 According to another aspect of the present invention, an electro-optic mirror assembly, such as an electrochromic mirror assembly, for a vehicle comprises an electrochromic mirror element comprising a first substrate having first and second surfaces and a second substrate having third and fourth surfaces. The first and second substrates are arranged so that the second surface opposes the third surface, with an electrochromic medium
30 disposed between the second substrate and the first substrate. The mirror element comprises a transflective reflector at the third surface, which comprises at least one conductive metallic reflective layer sandwiched between first and second substantially transparent semi-conducting non-metallic layers. The first substantially transparent semi-conducting non-

metallic layer contacts the electrochromic medium. The mirror assembly includes a display at the fourth surface of the second substrate. A refractive index and a physical thickness of each of the first and second substantially transparent semi-conducting non-metallic layers and the substantially reflective metallic conducting layer are selected such that the transfective reflector is selectively spectrally tuned to substantially transmit at least one preselected spectral band of visible light therethrough while substantially reflecting other visible light. The display is configured to emit visible light with a peak intensity within the preselected spectral band.

According to other aspects of the present invention, an electrochromic mirror assembly for a vehicle includes an electrically variable mirror element. The mirror element includes a first substrate having first and second surfaces and a second substrate having third and fourth surfaces. The first and second substrates are arranged so that the second surface opposes the third surface. The second substrate includes a conductive stack on the third surface. The conductive stack may comprise a first electrically conductive or semi-conductive layer deposited on the third surface, a reflective or metallic layer of reflective or metallic material on the first electrically semi-conductive layer, and a second electrically conductive or semi-conductive layer on the reflective layer. The mirror element includes an electrochromic medium disposed between the second electrically semi-conductive layer of the second substrate and the electrically semi-conductive coating on the second surface of the first substrate. The thicknesses and materials of the layers are selected to provide or exhibit a spectrally selective visible light transmission characteristic for a particular spectral band or range of wavelengths to provide enhanced transmissivity of the spectral band of light through the reflective element while providing sufficient reflectivity of other light.

In one form, the electrochromic mirror assembly may include a display positioned at the fourth surface, wherein the display is operable to emit light through the mirror element for viewing by a driver of the vehicle. The thicknesses of the particular layers of the conductive stack are selected such that the mirror element is spectrally tuned to transmit a predetermined spectral band of light therethrough. The spectral band that is transmittable through the mirror element may be selected to match a spectral band or range of light wavelengths emitted by the display element, such that the mirror element is spectrally tuned for the particular display element positioned at the fourth surface of the mirror element. The mirror element thus may be spectrally tuned to match at least a portion of the transmissive band or range of wavelengths of the mirror element to a particular band or range

of wavelengths of the light being emitted by the display element. In one form, the peak transmissivity of the transmissive band of the mirror element is selected to match the peak intensity of the spectral band emitted by the display element. The conductive stack preferably provides at least approximately 60 percent photopic reflectance (preferably measured in accordance with Society of Automotive Engineers test procedure SAE J964a, which is hereby incorporated herein by reference in its entirety), more preferably at least approximately 70 percent photopic reflectance, and most preferably at least approximately 80 percent photopic reflectance, while providing at least approximately 10 percent transmission, preferably at least approximately 15 percent transmission, more preferably at least approximately 20 percent transmission, and most preferably at least approximately 30 percent transmission, of at least a particular spectral band of light. Preferably, the physical thicknesses of the layers are selected to limit tinting and/or color interference affects as seen in the mirror element (i.e. to provide a neutral reflector) and to spectrally tune the mirror element for a transmission characteristic for providing enhanced transmissivity through the mirror element for a particular spectral band or range of wavelengths, in order to match the transmissivity of the mirror element to the spectral band of emission of light from the display element.

The semi-conductive layers and metallic layer of the conductive stack are preferably deposited at the third surface via a sputter coating process. The present invention thus provides a low cost reflective element which provides for sufficient transmission of a particular spectral band or bands of visible light and sufficient reflectance at the third surface of the mirror assembly (with at least 60% photopic reflectance preferred, more preferably, with at least 70% photopic reflectance, and most preferably, with at least 75% photopic reflectance). Preferably, the semi-conducting layers, such as indium tin oxide or the like, sandwiching the metallic layer are formed of the same material. Thus, for example, a preferred conductive stack may comprise a metallic layer of silver sandwiched between two semi-conducting layers of indium tin oxide.

According to another aspect of the present invention, an electro-optic or electrochromic interior rearview mirror assembly comprises an electro-optic or electrochromic mirror reflective element. The electro-optic mirror element provides a substantially reflective mirror element having a first region having a first reflectivity and a first transmissivity and a second region having a second reflectivity and a second transmissivity. The electro-optic mirror element includes a display element positioned at or

behind the second region and operable to transmit light through the second region. The first reflectivity is greater than the second reflectivity. Preferably, the second region provides at least approximately 25% transmissivity of light from the display.

Therefore, the present invention provides a third surface reflective element or mirror element which is sufficiently and spectrally selectively transmissive or spectrally tuned to allow a particular spectral range or band of light to pass therethrough from a display at the fourth surface of the mirror assembly. The layers of the reflective element are selected or spectrally tuned to match one or more predetermined or selected spectral bands or ranges of wavelengths and to thus pass the predetermined spectral bands of light therethrough, while being substantially reflective to other spectral bands or wavelengths of light, and do not require windows or apertures formed in the reflective metallic layer of the reflective element.

These and other objects, advantages, purposes, and features of the invention will become more apparent from the study of the following description taken in conjunction with the drawings.

15 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a sectional view of a conventional electrochromic mirror reflective element;

FIG. 1A is a graphical depiction of the transmissivity of visible light of the conventional electrochromic mirror reflective element of FIG. 1;

20 FIG. 2 is a perspective view of an interior rearview mirror assembly in accordance with the present invention;

FIG. 3 is a sectional view of the mirror assembly taken along the line III-III in FIG. 2;

25 FIG. 4 is a sectional view of a second substrate and opaque conductive and reflective layers suitable for use in the mirror assembly of FIG. 2;

FIG. 5 is a front elevation of a second substrate of a reflective element in accordance with the present invention, with a tab-out portion to facilitate electrical connection with the conductive layers;

30 FIG. 6 is a sectional view of the second substrate taken along the line VI-VI in FIG. 5;

FIG. 7 is a perspective view of another interior rearview mirror assembly in accordance with the present invention, with a display;

FIG. 8 is a sectional view of a reflective element of the mirror assembly taken along the line VIII-VIII in FIG. 7;

FIG. 9 is a sectional view similar to FIG. 6 of a second substrate in accordance with the present invention, which is suitable for use in the mirror assembly of FIG. 7, and
5 includes a tab-out portion to facilitate electrical connection with the conductive layers;

FIG. 10 is a sectional view of another second substrate and transmissive conductive and reflective layer or stack in accordance with the present invention suitable for use in a mirror assembly having a display;

FIG. 11 is another sectional view of a particular embodiment of a reflective
10 element of the present invention;

FIG. 11A is a graphical depiction of the transmissivity of the reflective element of FIG. 11;

FIG. 11B is a graphical depiction of the emission spectrum of the display element for the reflective element of FIG. 11;

FIG. 12 is another sectional view of another particular embodiment of a
15 reflective element of the present invention;

FIG. 12A is a graphical depiction of the transmissivity of the reflective element of FIG. 12;

FIG. 12B is a graphical depiction of the emission spectrum of the display
20 element for the reflective element of FIG. 12;

FIG. 13 is another sectional view of another particular embodiment of a reflective element of the present invention;

FIG. 13A is a graphical depiction of the transmissivity of the reflective element of FIG. 13;

FIG. 14 another sectional view of a particular embodiment of a double stack
25 reflective element of the present invention;

FIG. 14A is a graphical depiction of the transmissivity of the double stack reflective element of FIG. 14;

FIG. 14B is a graphical depiction of the emission spectrum of the display
30 element for the double stack reflective element of FIG. 14;

FIG. 15 another sectional view of another particular embodiment of a double stack reflective element of the present invention;

FIG. 15A is a graphical depiction of the transmissivity of the double stack reflective element of FIG. 15;

FIG. 16 another sectional view of a particular embodiment of a multiple stack reflective element of the present invention;

5 FIG. 16A is a graphical depiction of the transmissivity of the multiple stack reflective element of FIG. 16;

FIG. 17 another sectional view of another particular embodiment of a multiple stack reflective element of the present invention;

10 FIG. 17A is a graphical depiction of the transmissivity of the multiple stack reflective element of FIG. 17; and

FIG. 18 is a forward facing view of another electro-optic mirror reflective element in accordance with of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 Referring now to the drawings and the illustrative embodiments depicted therein, an electrochromic interior rearview mirror assembly 10 is mounted to a mounting button 12 mounted at an interior surface of a windshield 14 of a vehicle (FIG. 2). Mirror assembly 10 includes a housing or casing 15 and an electrochromic reflective element or mirror element 16 which has electrically variable reflectivity. Reflective element 16 includes first and second glass substrates 22, 24, and provides a third surface reflective element, 20 whereby the reflective coating of the reflective element 16 is deposited on the third surface 24a of the substrates (FIG. 3). An electrochromic medium 40 and a plurality of metallic and non-metallic conducting or semi-conducting layers 28 are disposed between the electrochromic medium 40 and the second substrate 24. The refractive indices and physical thicknesses of the layers are selected to maximize transmission of a particular spectral band of light while substantially reflecting other light. Although shown and described herein as 25 being implemented in an interior rearview mirror assembly of a vehicle, the reflective element or mirror element of the present invention is equally suitable for exterior rearview mirror assemblies for vehicles or for other mirror assemblies, without affecting the scope of the present invention.

30 Electrochromic reflective element 16 comprises a first substantially transparent substrate 22 and a second substantially transparent substrate 24 (which may be glass substrates or the like). The first substrate 22 includes an electrically conductive or semi-conductive layer 26, such as a tin oxide or indium tin oxide (ITO) or any other

transparent electrically semi-conductive layer or coating or the like (such as ICO, IWO, IO layers or the like), deposited on an inward surface 22a of first substrate 22 (i.e., the second surface 22a of the reflective element 16).

Also, the first (outermost) surface 22b of front substrate 22 may be optionally coated with an anti-wetting property such as via a hydrophilic coating (or stack of coatings), such as is disclosed in U.S. Patents 6,193,378; 5,854,708; 6,071,606 and 6,013,372, the entire disclosures of which are hereby incorporated by reference herein. Also, the first (outermost) surface 22b of front substrate 22 may be optionally coated with an anti-wetting property such as via a hydrophobic coating (or stack of coatings), such as is disclosed in U.S. Patent 5,724,187, the entire disclosure of which is hereby incorporated by reference herein. Such hydrophobic property on the first/outermost surface of electrochromic mirror reflective elements (and on the first/outermost surface of non-electrochromic mirror, non-electrooptical conventional reflective elements) can be achieved by a variety of means such as by use of organic and inorganic coatings utilizing a silicone moiety (for example, a urethane incorporating silicone moieties) or by utilizing diamond-like carbon coatings. For example, long-term stable water-repellent and oil-repellent ultra-hydrophobic coatings, such as described in PCT Application Nos. WO0192179 and WO0162682, the entire disclosures of which are hereby incorporated by reference herein, can be disposed on the first (outermost) surface 22b of front substrate 22. Such ultra-hydrophobic layers comprise a nano structured surface covered with a hydrophobic agent which is supplied by an underlying replenishment layer (such as is described in Classen et al., "Towards a True "Non-Clean" Property: Highly Durable Ultra-Hydrophobic Coating for Optical Applications", ECC 2002 "Smart Coatings" Proceedings, 2002, 181-190, the entire disclosure of which is hereby incorporated by reference herein).

Second substrate 24 includes at least three layers or coatings defining a reflective and conductive layer or stack or ISI layer or stack 28 (i.e., the combination or stack of a layer of a semi-conducting coating (such as an ITO layer or the like); a metallic layer (such as a layer of silver, aluminum or an alloy of silver or an alloy of aluminum or other metal or metal alloy); and another layer of a semi-conducting coating (such as an ITO layer or the like), as discussed below, is referred to herein as an ISI stack or layer) on an inward surface 24a of second substrate 24 (or the third surface of the reflective element). Thus, an ISI stack 28 comprises a metallic layer sandwiched between two semi-conducting layers (both of which preferably are the same material, but either of which can be different from the

other). In the illustrated embodiment of FIG. 4, ISI layer 28 comprises a first semi-conductive layer 30 disposed on inward surface 24a of second substrate 24, a second semi-conductive layer or adhesion layer 32 disposed on semi-conductive layer 30, a metallic layer or coating 34 disposed on semi-conductive layer 32, and a transparent semi-conductive layer or passivation layer 36 disposed on metallic layer 34. As shown in FIGS. 3 and 4, first semi-conductive layer 30 extends outwardly from the other ISI layers 32, 34 and 36, in order to provide for electrical connection with bus bars 38 of mirror assembly 10. As referred to herein as an "ISI layer" or an "ISI stack", the conductive and reflective stack or layers of the present invention may comprise materials or coatings other than ITO, ICO, IO, IWO layers or coatings or the like and silver or silver alloy layers or coatings, without affecting the scope of the present invention. For example, a semi-conducting layer of doped zinc oxide, or a semi-conducting layer of cadmium stannate, or a semi-conducting layer of titanium nitride or other titanium compound or the like may be used in the stack, without affecting the scope of the present invention.

As shown in FIG. 3, the first and second substrates 22, 24 are positioned in spaced-apart relationship with one another with an electrochromic medium 40 disposed between semi-conductive layer 26 and semi-conductive layer 36. The electrochromic medium 40 changes color or darkens in response to electricity or voltage applied to or through the semi-conductive layers 26 and 30 at either side of the electrochromic medium. The electrochromic medium 40 disposed between the front and rear substrates 22, 24 may be a solid polymer matrix electrochromic medium, such as is disclosed in U.S. Pat. No. 6,154,306, which is hereby incorporated by reference herein, or other suitable medium, such as a liquid or solid medium or thin film or the like, such as the types disclosed in U.S. pat. application, Ser. No. 09/793,002, entitled VIDEO MIRROR SYSTEMS INCORPORATING AN ACCESSORY MODULE, filed Feb. 26, 2001 (Attorney Docket No. DON01 P-869), and in U.S. Pat. Nos. 5,668,663 and 5,724,187, the entire disclosures of which are hereby incorporated by reference herein, without affecting the scope of the present invention. The electrochromic mirror element may utilize the principles disclosed in commonly assigned U.S. Pat. Nos. 5,140,455; 5,151,816; 6,178,034; 6,154,306; 6,002,544; 5,567,360; 5,525,264; 5,610,756; 5,406,414; 5,253,109; 5,076,673; 5,073,012; 5,117,346; 5,724,187; 5,668,663; 5,910,854; 5,142,407 or 4,712,879, which are hereby incorporated herein by reference, or as disclosed in the following publications: N. R. Lynam, "Electrochromic Automotive Day/Night Mirrors", *SAE Technical Paper Series* 870636 (1987); N. R. Lynam, "Smart

Windows for Automobiles", *SAE Technical Paper Series* 900419 (1990); N. R. Lynam and A. Agrawal, "Automotive Applications of Chromogenic Materials", *Large Area Chromogenics: Materials and Devices for Transmittance Control*, C.M. Lampert and C.G. Grandquist, EDS., Optical Engineering Press, Wash. (1990), which are hereby incorporated
5 by reference herein, and in U.S. pat. application, Ser. No. 09/792,002, filed Feb. 26, 2001 by Schofield et al. for VIDEO MIRROR SYSTEMS INCORPORATING AN ACCESSORY MODULE (Attorney Docket DON01 P-869), which is hereby incorporated herein by reference. Reflective element 16 may also include a seal 41 positioned around the outer portions of the layers 32, 34, 36 and the electrochromic medium 40 to seal the layers and
10 avoid corrosion of the metallic layer 34.

During operation, a voltage may be applied to reflective element 16 via bus bars 38 positioned around and engaging the outer edges of the semi-conductive layers 26, 30 (FIG. 3). The voltage applied by bus bars 38 is bled from semi-conductive layer 30 and through the layers 32, 34, 36 to the electrochromic medium 40. The ISI layer 28 of the
15 present invention preferably provides for reduced resistance through the layers, which provides for faster, more uniform coloration of the electrochromic medium 40, since the electrons applied via bus bars 38 at semi-conductive layer 30 may bleed through the semi-conductive layers 32, 36 faster due to the enhanced conductivity in the conductive layers 32, 36. Preferably, the ISI layer or stack 28 provides a sheet resistance of less than
20 approximately 10 ohms per square, more preferably less than approximately 5 ohms per square, and most preferably less than approximately 2 ohms per square. Desirably, and particularly for larger area mirrors, the sheet resistance is less than approximately 1 ohm per square, such as in the range of approximately 0.1 to 0.7 ohms per square.

In order to provide enhanced performance of the electrochromic element, each
25 of the layers of the ISI layer or stack has substantial conductivity and none of the layers significantly retard electron/electrical conductivity from one layer to the other throughout the stack, and, thus, do not impede the flow of electrons into the electrochromic (EC) medium. In this regard, it is desirable that one or more of the metallic layers comprises a metallic material (which is preferably a highly reflective material, such as silver or silver alloys or the
30 like) having a specific resistivity of preferably less than approximately 5×10^{-5} ohm.cm, more preferably less than approximately 1×10^{-5} ohm.cm, and most preferably less than approximately 5×10^{-6} ohm.cm. Preferably, such a highly conductive metallic layer or layers is/are sandwiched between two non-metallic, partially conducting layers, preferably formed

of a non-metallic material (such as a semi-conducting oxide, such as indium oxide, tungsten oxide, tin oxide, doped tin oxide or the like) having a specific resistivity of less than approximately 1×10^{-2} ohm.cm, more preferably less than approximately 1×10^{-3} ohm.cm, and most preferably less than approximately 5×10^{-4} ohm.cm.

5 In the illustrated embodiment of FIGS. 3 and 4, first semi-conductive layer 30 is deposited on inward surface 24a of second substrate 24. The semi-conductive layer 30 may be deposited on the glass or substrate 24 via any suitable process. The particular thickness of the conductive layer may vary depending on the particular application of reflective element 16, as discussed below. In the illustrated embodiments of FIGS. 2-4, the
10 semi-conductive layer 30 need not be transparent and may comprise a chromium layer or the like. However, the semi-conductive layer 30 may comprise a generally transparent semi-conductive layer of coating, such as a tin oxide layer, an indium tin oxide (ITO) layer or the like, without affecting the scope of the present invention. In a preferred embodiment, semi-conductive layer 30 may comprise a chromium layer on surface 24a of second substrate 24.

15 The transparent semi-conductive layers 32 and 36 of ISI layer 28 on second substrate 24 preferably comprise non-metallic transparent electrically conducting or semi-conducting materials, such as tin oxide, indium oxide, indium cerium oxide, indium tungsten oxide, nickel oxide, tungsten oxide, indium tin oxide, half-wave indium tin oxide, full wave indium tin oxide, doped tin oxides, such as antimony-doped tin oxide and fluorine-doped tin
20 oxide, doped zinc oxides, such as antimony-doped zinc oxide and aluminum-doped zinc oxide and/or the like. Preferably, both of the semi-conductive layers 32, 36 comprise the same type of material for ease of manufacturing, as discussed below.

 Metallic layer or coating 34 comprises a thin film or layer of metal, such as silver, aluminum, or alloys thereof, or the like, with a selected thickness to provide sufficient
25 reflectivity and/or transmissivity, as discussed below. Preferably, the selected metallic material comprises silver, but may otherwise comprise a material selected from aluminum, silver alloys, aluminum alloys (such as 6061 or 1100 aluminum alloys or the like), manganese, chromium or rhodium, or any other metallic material which is sufficiently reflective and/or transmissive at a selected thickness. The thickness of metallic layer 34 is
30 preferably selected to be thick enough (such as approximately 600-1000Å) to be substantially reflective and not transmissive, such that the ISI layer 28 is substantially opaque or non-transparent.

In a preferred embodiment, the semi-conductive layer 30 comprises indium tin oxide (ITO) and is deposited onto surface 24a of substrate 24 via a hot deposition process, involving, for example, sputter deposition onto a heated substrate, with the heated substrate often being heated to a temperature of greater than about 200°C, sometimes greater than 300°C, as is known in the art. The combination of the semi-conductive layer 30 on the substrate 24 defines a conductive substrate which may be used for various embodiments of the present invention, as discussed below.

The semi-conductive layer 32 of ISI layer 28 may be deposited onto semi-conductive layer 30 via a cold deposition process, such as sputter coating or the like onto an unheated substrate. Preferably, each of the layers 32, 34, 36 of ISI layer 28 is deposited on second substrate 24 by a sputter deposition process. More particularly, the substrate 24 (including the semi-conductive layer 30 already deposited thereon) may be positioned in one or more sputter deposition chambers with either planar or rotary magnetron targets, and with deposition of the layers being achieved by either reactive deposition of an oxide coating by sputtering from a metal target (or from a conductive, pressed oxide target) in an oxygen-rich atmosphere, or by DC sputtering from an oxide target, such as an IO, IWO, ITO or ICO target or the like. For example, the substrate 24 may be sputter coated with two targets in a single chamber, such as by depositing the ITO layer 32 on semi-conductive layer 30, turning or flipping the targets for sputter coating of the metallic layer 34, and then turning the targets back to deposit the second ITO layer or passivation layer 36 on the metallic layer 34. With such a process, it is important that the two ITO layers 30, 34 comprise the same conductive material. Alternately, two targets may be positioned in a row, such that the substrate 24 is moved from one target (for the first ITO coating) to the other (for the metallic coating) and then back to the first (for the second ITO coating). It is further envisioned that three targets may be positioned in a row, with each target depositing the layer in order on the substrate (in which case it would not be as important to have the semi-conductive or ITO layers 32, 36 comprise the same material). Other processes for applying or depositing layers of conductive material or layers and metallic material or layers may be implemented, without affecting the scope of the present invention. In the illustrated embodiment of FIGS. 2 and 3, semi-conductive layer 30 may be deposited or applied to substantially the entire surface 24a of substrate 24, while the outer region or edge of semi-conductive layer 30 and substrate 24 may be masked during the deposition process so that layers 32, 34, 36 do not cover the outer edge of substrate 24 and semi-conductive layer 30.

Because the embodiment of the present invention illustrated in FIG. 4 does not include a display on demand or other type of display transmitting or projecting through the electrochromic reflective element, it is desirable to have a thick metallic or silver layer 34, such as in a range of approximately 600-1000Å, since the metallic layer does not have to be transmissive of any light therethrough. It is also unnecessary for the second substrate to be transparent. However, it is desirable to avoid tinting or color interference affects as seen in reflection from the reflector (which may arise when stacking layers of conductive coatings and/or metallic coatings on top of one another), since it is desirable to have a neutral or non-colored/non-tinted reflector when no voltage is applied across the electrochromic medium.

Optionally, the metallic layer may be absent or removed at portions, such as to create a local window for placement therebehind of a light emitting display, such as a compass display or PSIR display or other informational display or the like, such as a display of the type disclosed in commonly assigned U.S. Pat. Nos. 6,222,460 and 6,326,900, which are hereby incorporated herein by reference in their entireties, but while maintaining at least the underlying semi-conducting ITO layer at the local window region so that electrical connection through the electrochromic medium at that local region is sustained. In this regard, it is preferable to have an ITO underlayer with a sheet resistance of less than approximately 80 ohms per square, more preferably less than approximately 25 ohms per square, and most preferably less than approximately 15 ohms per square.

In order to avoid such undesirable tinting or color interference affects, such as yellow tinting or other color tinting of the compound or stacked reflective element, as seen in the reflection when the electrochromic reflective element is unpowered, the physical thicknesses of the conductive layers and the metallic layer are selected to provide a desired combination of layer thicknesses to achieve the desired results. For example, the ISI layer 28 may include an adhesion layer or undercoating semi-conductive layer 32 of approximately 100Å +/- 50Å of ITO or the like, a silver layer 34 of approximately 800Å +/- 200Å and a passivation semi-conductive layer 36 of approximately 120Å +/- 25Å of ITO or the like, which provides a desired result with minimal yellow tinting or other color tinting or color interference affects as seen in the reflection.

The range of thicknesses of the layers may be selected to provide a desired untinted affect in the reflection, such that the reflective element may be spectrally tuned to provide a desired reflectant untinted appearance. Testing of various embodiments has shown that the thicknesses of the layers may vary by approximately 25 percent or more from a

desired or targeted dimension, yet will still provide the desired results. Such tolerances significantly ease the processing of the ISI layer, since this is well within the capability of typical sputter coating equipment. Preferably, the layers of the reflective element and ISI stack are selected such that the reflective element provides a substantially spectrally untinted reflection when viewed by a driver or passenger in the vehicle when no voltage is applied across the electrochromic medium. Also, the layers preferably may be selected and combined to exhibit a spectrally selective transmissive characteristic, which is established by the refractive indices and physical thicknesses of the layers disposed between the electrochromic medium and the third surface of the second substrate.

Although the above embodiment provides a desired neutral color/tint for the reflector, if the passivation layer 36 is increased in thickness, the reflector may become tinted or yellowed. However, if the passivation layer is further increased in thickness to approximately 680\AA , then the non-tinting is approximately the same as when the passivation layer has a thickness of approximately 120\AA . This periodic change in tinting affect in response to the thicknesses of the layers or coatings of the ISI layer of the present invention allows for selection of different thicknesses of the layers depending on the particular application and desired result of the electrochromic reflective element of the present invention.

Referring now to FIGS. 5 and 6, a reflective element 116 may have an ISI stack or layer 128 comprising a first semi-conductive layer or adhesion layer 132 deposited or sputter coated directly onto surface 24a of second substrate 24, a metallic layer 134 deposited on semi-conductive layer 132, and a second semi-conductive layer or passivation layer 136 deposited on metallic layer 134. The substrate 24 is masked around substantially the entire outer region 24c of surface 24a during the deposition process, such that the ISI layer 128 is not deposited in the masked region 24c. However, the substrate is not masked over the entire outer edge or region of substrate 24, in order to allow deposition of the ISI layer at a particular area, such that a tab-out portion or area 131 is formed in the ISI layer 128. The tab out area 131 facilitates electrical connection with the conductive coatings 132, 134, 136, such that the first semi-conductive layer 30 of reflective element 16 is not required. In a preferred embodiment of the present invention, the reflective element 116 may include a semi-conductive layer 132 of an ITO coating which has a thickness of approximately $100\text{\AA} \pm 25\text{\AA}$, a silver layer 134 having a thickness of approximately $900\text{\AA} \pm 100\text{\AA}$, and a second semi-conductive layer 136 of ITO or the like having a thickness of approximately $120\text{\AA} \pm$

25Å. Such an arrangement of semi-conductive layers and a sandwiched metallic layer provides a neutral reflectance with minimal tinting or color interference affects as seen in reflectance and with the electrochromic medium unpowered.

5 The opaque ISI layer 28, 128 and third surface reflective element of the present invention therefore provides an economical, low cost electrochromic reflective element, which provides a neutral color reflection. Typically, for a sputter coating operation, a range of within +/- 5% of a nominal target for uniformity of coating is desired. However, in the present invention, the uniformity tolerance is approximately +/- 25% for each of the coatings or layers from cell to cell. The ISI layer on the second substrate is thus easy and fast
10 to manufacture due to the thicknesses and the tolerances for the thickness of each particular coating.

Referring now to FIGS. 7 and 8, a mirror assembly 210 in accordance with the present invention (shown as an interior rearview mirror assembly in FIG. 7; however, the mirror assembly may be an exterior mirror assembly or other mirror assembly, without
15 affecting the scope of the present invention) may include a display system or element 218 which is operable to provide, emit or display information or light through a mirror element or reflective element 216 of the mirror assembly. The light is emitted through the reflective element 216 at a display area 220 of mirror assembly 210, such that the display information or light is viewable by a driver of the vehicle. The reflective element 216 includes first and
20 second substrates 222, 224, and a conductive and transmissive ISI stack or layer 228 disposed on the inward surface 224a of the second substrate (or the third surface of the reflective element). The second substrate 224 and ISI layer 228 comprise a transflective one way mirror, such as disclosed in commonly assigned U.S. pat. application, Ser. No. 10/054,633, filed Jan. 22, 2002 by Lynam et al. for VEHICULAR LIGHTING SYSTEM (Attorney
25 Docket DON01 P-962), which is hereby incorporated herein by reference. Preferably, the mirror reflective element (behind which the display is disposed so that the information displayed is visible by viewing through the mirror reflective element) of the mirror assembly comprises a transflective mirror reflector such that the mirror reflective element is significantly transmitting to visible light incident from its rear (i.e., the portion furthest from
30 the driver in the vehicle), while simultaneously, the mirror reflective element is substantially reflective to visible light incident from its front (i.e. the position closest to the driver when the interior mirror assembly is mounted in the vehicle). The transflective electrochromic reflective mirror element (such as is disclosed in U.S. pat. application, Ser. No. 09/793,002,

entitled VIDEO MIRROR SYSTEMS INCORPORATING AN ACCESSORY MODULE, filed Feb. 26, 2001 (Attorney Docket No. DON01 P-869) and in U.S. Pat. Nos. 5,668,663 and 5,724,187, the entire disclosures of which are hereby incorporated by reference herein) comprises an electrochromic medium sandwiched between two substrates.

5 The ISI stack or layer 228 includes a conductive metallic layer 234, which is thin enough to be sufficiently transparent or transmissive to allow the display information to be transmitted through the ISI layer 228 and through reflective element 216 for viewing by the driver of the vehicle. As the thickness of the metallic layer 234 decreases, the transmissivity increases, but the reflectivity decreases. Therefore, a desired thickness of the
10 metallic layer (along with a desired thickness of the other layers of the ISI stack or layer) must be selected to provide sufficient reflectivity and transmissivity, as discussed below. Because the metallic layer 234 is at least partially transmissive, it is desirable to provide an opaque coating or tape or the like 225 on an outer surface 224b of second substrate 224 (or the fourth surface of the reflective element 216). The coating or tape 225 may be a black tape
15 or other color tape or coating.

 Display system 218 preferably comprises a display on demand type of display and includes a display element or light emitting device 218a positioned at the back surface 224b of second substrate 224. Display element 218a is operable to emit light, such as in the form of indicia, alphanumeric characters, images, or the like, in response to a control or input.
20 Display element 218a may be a vacuum fluorescent (VF) display, a light emitting diode (LED), an organic light emitting diode (OLED), a gas discharge display, a plasma display, a cathode ray tube, a backlit active matrix LCD screen, an electroluminescent display, a field emission display or the like, without affecting the scope of the present invention. The particular display element may be selected to provide a desired color to the display. For
25 example, a VF display may provide a blue-green color or other colors to the information displayed (depending on the phosphor selected for the display), while a light emitting diode may provide other colors, such as reds, ambers, or other colors.

 Preferably, the display is a display-on-demand type of display, such as of the type disclosed in commonly assigned U.S. Pat. Nos. 5,668,663 and 5,724,187, and/or in U.S.
30 pat. applications, Ser. No. 10/054,633, filed Jan. 22, 2002 by Lynam et al. for VEHICULAR LIGHTING SYSTEM (Attorney Docket DON01 P-962); and Ser. No. 09/792,002, filed Feb. 26, 2001 by Schofield et al. for VIDEO MIRROR SYSTEMS INCORPORATING AN ACCESSORY MODULE (Attorney Docket DON01 P-869), which are all hereby

incorporated herein by reference. With such a display, it is not only desirable to adjust the display brightness according to ambient lighting conditions, but it is also desirable to adjust the display brightness such that a sufficient contrast ratio is maintained against the variable background brightness of the reflected scene. Also, it may be desirable to compensate for changes in transmission of the electrochromic device effected to control rearward glare sources, in order that the display brightness appears to be maintained at a generally constant level.

It is envisioned that the display 218 may include a filter or spectral element 217 positioned between the illumination source or display element 218a of the display 218 and the outer or fourth surface 224b of second substrate 224. The filter 217 may function to filter out light having a wavelength outside of the desired band of light being emitted by the display element or, in other words, the filter or spectral element 217 may transmit a band width of light that substantially matches the particular spectral output of the display or that substantially matches a desired color for the display information. By transmitting only the spectral band which at least generally matches the spectral output of the display device, the filter functions to filter out ghost images of the display, where ambient light may enter the display, such that the display characters may be visible through the reflective element when the display is off.

Because the reflectivity of the metallic layer 234 provides sufficient reflectance over its entire surface (i.e., there are no "windows" formed in or through the metallic layer), mirror assembly 210 may include other displays or multiple display on demand displays, or other types of displays, such as one or more "display on need" displays or the like. For example, one or more display on need displays 213 (FIG. 7) may be provided, such as to indicate to the driver of the vehicle that a door is ajar, or that the driver's seat belt is not fastened, or any other condition or status that may be important to the driver of the vehicle. The display on need type display or displays may provide indicia, alphanumeric characters, symbols, or the like via one or more light emitting sources (not shown) behind the second substrate in a similar manner as display system 218 discussed above, and may include a filter (also not shown) for filtering out light that is not within the desired spectral band of the particular display system.

In the illustrated embodiment of FIG. 8, ISI layer or stack 228 includes a first semi-conductive layer 230, a second semi-conductive layer or adhesion layer 232, a reflective and transmissive metallic layer 234 and a semi-conductive or passivation layer 236. Similar

to ISI layer 28, discussed above, semi-conductive layer 230 may be deposited or applied to substantially the entire surface 224a of substrate 224, while the outer region or edge of semi-conductive layer 230 and substrate 224 may be masked during the deposition process so that the layers 232, 234, 236 do not cover the outer edge of substrate 224 and semi-conductive layer 230.

Preferably, the physical thicknesses of the metallic layer 234 and the semi-conductive layers 230, 232 and 236 are selected to provide sufficient transmissivity of at least a particular spectral band or range of wavelengths of light which generally matches the peak intensity spectral band of light being emitted by the display. Such spectral tuning or matching of the layers to the display allows the display information to transmit through the reflective element for viewing of the display information by the driver of the vehicle, while also providing sufficient reflectivity over the entire reflective element, and while minimizing the tinting or color interference affects on the reflected image (or targeting such tinting affects toward a desired color). Preferably, the light transmission of the particular spectral band through the reflective element is greater than approximately 15 percent and the reflectivity of the reflective element to other wavelengths of light is greater than approximately 80 percent. More preferably, the light transmission is greater than approximately 20 percent, and most preferably greater than approximately 25 percent.

The reflective element 216 is spectrally tuned to maximize transmissivity of a particular desired or targeted range or ranges of wavelengths or spectral bands and to substantially reflect or not transmit other wavelengths of light. The particular choices or thicknesses of the layers is influenced by the spectral emission of the display being used in the mirror assembly. In one exemplary, preferred embodiment of the present invention, a transmissive ISI layer or stack 228 includes a metallic layer 234 of approximately 350Å sandwiched between a semi-conductive passivation layer 236 of approximately 680Å and a semi-conductive adhesion layer 232 of approximately 410Å. The adhesion layer 232 is deposited on a semi-conductive layer 230 having a thickness of approximately 300Å. In this embodiment, the ISI layer 228 is spectrally tuned for transmission of an orange light (having a peak intensity wavelength in the range of approximately 600 nm) emitting from display device 218a.

In certain conditions, the ambient light intensity within the cabin of the vehicle may be sufficiently high so that reflected light from the mirror reflective element and, in particular, from the display region 220, tends to "wash-out" the display. It is envisioned that

this glare may be reduced by taking advantage of the electrochromic function of the mirror assembly. More particularly, the electrochromic medium 240 of the electrochromic mirror reflective element 216 may be colored or darkened in the area of the display by constructing a locally addressable region across the display (as shown at 220, 220a of FIG. 7). This may be achieved by creating a deletion line in the second surface semi-conductive layer 226 at the second surface of the first or front substrate 222 (FIG. 8) and/or in the third surface semi-conductive layer 230 (or a third surface semi-conductive layer of the type shown in FIG. 9 and described below at 332), hence breaking electrical continuity from the rest of the electrochromic cell. An ambient light sensor (not shown) may be used to detect the critical ambient light levels at which "wash-out" is a problem. The addressable region may then be separately colored or darkened to the appropriate level to reduce the glare from the display area in response to the ambient light sensor. Although such a glare problem could be solved by coloring the entire mirror, by localizing the region of coloration to only the display area, the electrochromic mirror assembly of the present invention allows the rest of the mirror reflective area, which does not incorporate the display, to retain full reflectivity while the display area is colored or darkened (such as may be useful when driving by day).

In another exemplary preferred embodiment of the present invention, a transmissive ISI layer includes a metallic layer 234 of approximately 400Å sandwiched between a semi-conductive passivation layer 236 of approximately 427Å and a semi-conductive adhesion layer 232 of approximately 100Å. The semi-conductive adhesion layer 232 is deposited on an adhesion or semi-conductive layer 230 having a thickness of approximately 300Å. In this embodiment, the ISI layer 228 is spectrally tuned for spectrally selective transmission of a blue-green light (having a peak intensity wavelength of approximately 505 nm) emitting from display device 218a.

The thickness of the first semi-conductive layer 230 is the same for each embodiment described above (and for the particular embodiments discussed below with respect to FIGS. 10-17), in order to provide a common conductive substrate (including the semi-conductive layer 230 already deposited or coated on the surface of the substrate) for the different particular applications of the substrate and ISI layers of the present invention. This eases the manufacturing of the reflective element, since the same hot ITO coating or the like may be applied to common substrates for various applications, and then the conductive substrates may be coated with different thickness layers of conductive and metallic coatings

for different applications of the reflective element (such as for mirrors having different colored displays).

As discussed above with respect to ISI layer 128, and with reference now to FIG. 9, the second substrate 324 may have an ISI layer 328 on its inward surface 324a which may include layers 332, 334, 336 which may have a tab-out portion 331 for electrical connections, so as to not require the first conductive layer, without affecting the scope of the present invention. Because the metallic layer 334 is thin and not as conductive as the metallic layer 134, discussed above, the tab-out portion 331 of ISI layer 328 is preferably substantially larger in size or width than the tab-out portion 131 may have been for ISI layer 128. In a particular exemplary preferred embodiment of the substrate 324 and ISI layer 328 of FIG. 9, where the conductive layer 332 is deposited directly on the surface 324a of substrate 324, the ISI layer 328 may include a metallic layer 334 of approximately 350Å sandwiched between a passivation layer 336 of approximately 700Å and an adhesion layer 332 of approximately 700Å. This combination or stack of layers on the glass or substrate 324 provides a transfective reflective element which is at least approximately 20 percent transmissive and which is spectrally tuned to pass a particular band of light being emitted by display device 218a of display system 218. In this particular embodiment, the transfective reflective element is spectrally tuned to pass light having a peak intensity wavelength of approximately 605 nanometers.

Other thicknesses of layers may be selected for different displays having different colors or wavelengths of emitted light, without affecting the scope of the present invention. The thicknesses and particular materials of the layers of the ISI stack and transfective reflector are selected such that their combination provides enhanced or substantial transmissivity of the spectral band or bands corresponding to the spectral band of light emitted by the particular display implemented in the reflective element, while providing substantial reflectance of other visible light.

Referring now to FIG. 10, a second substrate 424 may have a double ISI layer 428 applied to inward surface 424a. Double ISI layer 428 includes a first semi-conductive layer 430 applied to or deposited on inward surface 424a, a second semi-conductive or adhesion layer 432a deposited on semi-conductive layer 430, a first metallic layer 434a deposited on semi-conductive layer 432 and another semi-conductive layer 436a deposited on metallic layer 434a. Double ISI layer 428 further includes a second metallic layer 434b deposited on semi-conductive layer 436a with another semi-conductive layer 436b deposited

on second metallic layer 434b. Therefore, the ISI stack or layer 428 is an alternating stack or combination of dielectric or transparent semi-conductive layers and metallic layers, whereby each metallic layer is sandwiched between a respective pair of conductive or semi-conductive non-metallic layers.

5 Such an arrangement may be used to provide a desired amount or increased amount of spectrally selective transmission of one or more particular spectral bands of light through the ISI layer, while increasing the reflectivity or maintaining the reflectivity of the ISI layer with respect to other spectral bands of light over the single ISI layer designs discussed above. More particularly, the double stack arrangement (or more layers if desired)
10 provides for increased transmission of a narrower spectral band of light, which allows the reflective element to transmit a high percentage (such as greater than approximately 50 percent transmissivity) of a selected narrow spectral band of light. The narrow spectral band is selected so as to be pinpointed or targeted at the particular peak intensity wavelength or wavelengths of light being emitted by the display device. Such an arrangement is particularly
15 suitable for use with display devices incorporating light emitting diodes, which may emit light within a particular, narrow spectral band. The particular thickness for each layer or coating may be selected depending on the particular application and desired results.

For example, in a single ISI layer design which provides approximately 20-25 percent transmissivity of a particular spectral band or range, the reflectance of the ISI layer
20 may be approximately 60-70 percent with respect to other light. If it is desired that the mirror have approximately 70 percent photopic reflectance or higher and increased transmissivity of a desired spectral band of light, a double ISI layer may be implemented. One particular embodiment of such as double ISI layer provides a semi-conductive layer (430 and/or 432) of approximately 708Å (such as a layer 430 of approximately 300 Å and a layer 432a of
25 approximately 408 Å) of ITO or the like, a first metallic layer 434a of approximately 411Å, a semi-conductive layer 436a of approximately 1009Å of ITO or the like, a second metallic layer 434b of approximately 360Å and a semi-conductive layer 436b of approximately 100Å of ITO or the like. This embodiment provides increased reflectivity of the reflective element to most wavelengths of light, while achieving the desired amount of transmissivity of the
30 particular, targeted spectral band or bands. This is because the two metallic layers 434a, 434b, which are generally planar and parallel to each other, are separated by a distance of the order of approximately 1000Å, which gives rise to multiple beam interference of the incident light, resulting in constructive interference at certain wavelengths and destructive interference

at other wavelengths. This particular example provides a reflective element which is spectrally tuned to substantially transmit light with a wavelength of approximately 602 nanometers, while substantially reflecting other visible light.

Other materials (with other refractive indices) and other physical thicknesses
5 may be selected to transmit other desired wavelengths or ranges of wavelengths, without affecting the scope of the present invention. Also, additional repeating layers may be added to form a multiple stack, such as an additional metallic conducting layer and an additional semi-conductive ITO layer (or the like), in order to achieve the desired affect. The repeating layers form a narrow band ISI stack (which may have seven or nine or more layers of
10 conductive layers and metallic layers), which functions to pass or transmit only such light which corresponds to one or more particular, substantially narrow spectral bands or ranges of wavelengths. The additional layers may provide enhanced performance of the reflective element with only an incremental increase in cost, since the additional layers are preferably deposited onto the other layers as part of the sputter coating process. With each additional set
15 or stack of layers, each of the reflective, metallic layers may be reduced in thickness, which may provide increased transmissivity through the stack for a targeted spectral band, while still providing the desired amount of reflectivity over the reflective element. For example, a nine layer ISI stack (such as shown in FIG. 17 and discussed below) may provide a reflective element that has a greater than approximately 60 percent transmissivity of one or more
20 particular, narrow spectral bands, and which is tuned or pinpointed to match the emission spectrum from a particular display device (such as a display device including a light emitting diode).

Referring now to FIGS. 11-17, several particular examples of a reflective
element or mirror element in accordance with the present invention are shown. The reflective
25 elements of FIGS. 11-17 incorporate the design and functional aspects of the reflective elements discussed above, and are provided as specific examples of the present invention. The materials and physical thicknesses of the layers are selected to provide different refractive indices and thicknesses to provide different beam interference of the incident light, thereby resulting in the desired transmissive range for a particular display element. In each
30 embodiment of FIGS. 11-17, the various layers and substrates are given similar reference numbers as shown with respect to the reflective elements shown in FIGS. 2-10, but with each embodiment adding 100 to the reference numbers of the previous embodiment.

In FIG. 11, a reflective element 516 has a front substrate 522 and a rear substrate 524 and a display element 518 at a rear or fourth surface of rear substrate 524. A semi-conductive ITO layer (or the like) 530 of approximately 30 nm is deposited on the forward or third surface of rear substrate 524, while a semi-conductive layer 526 (such as ITO, tin oxide or the like) is deposited on the rear or second surface of front substrate 522. An ISI stack or layer 528 and an electrochromic (EC) medium 540 and seal 541 are provided between the semi-conductive layers 526, 530. ISI layer 528 comprises a substantially transparent semi-conducting non-metallic adhesion layer 532 of approximately 41 nm of ITO, ICO, IWO or the like, a metallic conducting layer 534 of approximately 35 nm of silver or silver alloy or the like, and a substantially transparent semi-conducting non-metallic passivation layer 536 of approximately 68 nm of ITO, ICO, IWO or the like. As shown in FIG. 11A, such a configuration provides a transmissivity of light through reflective element 516 with a peak transmissivity of light having a wavelength of approximately 580 nm. The transfective reflector of the reflective element 516 is thus spectrally tuned to transmit light emitted from an orange vacuum fluorescent display 518, which emits light having a peak intensity of approximately 580 nm, as shown in FIG. 11B. The display 518 may also include a color filter 517, such as discussed above with respect to display 218.

In FIG. 12, a reflective element 616 has a front substrate 622 and a rear substrate 624 and a display element 618 at a rear or fourth surface of rear substrate 624. A semi-conductive ITO layer (or the like) 630 of approximately 30 nm is deposited on the forward or third surface of rear substrate 624, while a semi-conductive layer 626 (such as ITO, tin oxide or the like) is deposited on the rear or second surface of front substrate 622. An ISI stack or layer 628 and EC medium 640 and seal 641 are provided between the semi-conductive layers 626, 630. ISI layer 628 comprises an adhesion layer 632 of approximately 10 nm of ITO, ICO, IWO or the like, a metallic layer 634 of approximately 40 nm of silver or silver alloy or the like, and a passivation layer 636 of approximately 43 nm of ITO, ICO, IWO or the like. As shown in FIG. 12A, such a configuration provides a transmissivity of light through the reflective element with a peak transmissivity of light having a wavelength of approximately 500 nm. The reflective element 616 is thus spectrally tuned to transmit light emitted from a blue-green vacuum fluorescent display 618, which emits light having a peak intensity of approximately 500 nm, as shown in FIG. 12B.

In FIG. 13, a reflective element 616' provides a substantially spectrally neutral transmission characteristic and has a front substrate 622' and a rear substrate 624' and a

display element 618' at a rear or fourth surface of rear substrate 624'. A semi-conductive ITO layer (or the like) 630' of approximately 30 nm is deposited on the forward or third surface of rear substrate 624', while a semi-conductive layer 626' (such as ITO, tin oxide or the like) is deposited on the rear or second surface of front substrate 622'. An ISI stack or layer 628' and EC medium 640' and seal 641' are provided between the semi-conductive layers 626', 630'. ISI layer 628' comprises an adhesion layer 632' of approximately 78 nm of ITO, ICO, IWO or the like, a metallic layer 634' of approximately 31 nm of silver or silver alloy or the like, and a passivation layer 636' of approximately 63 nm of ITO, ICO, IWO or the like. As shown in FIG. 13A, such a configuration provides a generally neutral transmission of light through the transfective reflective element for most wavelengths of visible light.

In FIG. 14, a reflective element 716 has a front substrate 722 and a rear substrate 724 and a display element 718 at a rear or fourth surface of rear substrate 724. A semi-conductive ITO layer (or the like) 730 of approximately 30 nm is deposited on the forward or third surface of rear substrate 724, while a semi-conductive layer 726 (such as ITO, tin oxide or the like) is deposited on the rear or second surface of front substrate 722. A double stack ISI stack or layer 728 and EC medium 740 and seal 741 are provided between the semi-conductive layers 726, 730. Double stack ISI layer 728 comprises a semi-conductive adhesion layer 732 of approximately 60 nm of ITO, ICO, IWO or the like, a first metallic layer 734a of approximately 33 nm of silver or silver alloy or the like, a semi-conductive layer 736a of approximately 117 nm of ITO, ICO, IWO or the like, a second metallic layer 734b of approximately 33 nm of silver, silver alloy or the like, and a semi-conductive layer 736b of approximately 86 nm of ITO, ICO, IWO or the like. As shown in FIG. 14A, such a configuration provides a transmissivity of light through the reflective element with a peak transmissivity of light having a wavelength of approximately 650 nm. The reflective element 716 is thus spectrally tuned to transmit light emitted from a red light emitting diode display 718, which emits light having a peak intensity of approximately 650 nm, as shown in FIG. 14B. As can be seen with reference to FIGS. 14A and 11A, the transfective reflector and double stack ISI layer 728 provide a narrower band of transmissivity for the desired spectral band or range of wavelengths being emitted by the display. Such a configuration thus may provide enhanced reflectivity of light outside of the targeted spectral band.

In FIG. 15, a reflective element 816 has a front substrate 822 and a rear substrate 824 and a display element 818 at a rear or fourth surface of rear substrate 824. A

semi-conductive ITO layer (or the like) 830 of approximately 30 nm is deposited on the forward or third surface of rear substrate 824, while a semi-conductive layer 826 (such as ITO, tin oxide or the like) is deposited on the rear or second surface of front substrate 822. A double stack ISI stack or layer 828 and EC medium 840 and seal 841 are provided between the semi-conductive layers 826, 830. Double stack ISI layer 828 comprises a semi-conductive adhesion layer 832 of approximately 23 nm of ITO, ICO, IWO or the like, a first metallic layer 834a of approximately 30 nm of silver or silver alloy or the like, a semi-conductive layer 836a of approximately 204 nm of ITO, ICO, IWO or the like, a second metallic layer 834b of approximately 34 nm of silver, silver alloy or the like, and a semi-conductive layer 836b of approximately 47 nm of ITO, ICO, IWO or the like. As shown in FIG. 15A, such a configuration provides a transmissivity of light through the reflective element with a peak transmissivity of light having a wavelength of approximately 500 nm. The reflective element 816 is thus spectrally tuned to transmit light emitted from a blue-green light emitting diode display 818, which emits light having a peak intensity of approximately 500 nm. Similar to double stack ISI layer 728 discussed above, the transflective reflector and double stack ISI layer 828 provide a narrower band of transmissivity for the desired spectral band or range of wavelengths being emitted by the display. Such a configuration thus may provide enhanced transmissivity of the preselected or targeted spectral band and enhanced reflectivity of light outside of the targeted spectral band.

In FIG. 16, a reflective element 916 has a front substrate 922 and a rear substrate 924 and a display element 918 at a rear or fourth surface of rear substrate 924. A semi-conductive ITO layer (or the like) 930 of approximately 30 nm is deposited on the forward or third surface of rear substrate 924, while a semi-conductive layer 926 (such as ITO, tin oxide or the like) is deposited on the rear or second surface of front substrate 922. A multiple stack ISI stack or layer 928, EC medium 940, seal 941 and encapsulant 943 are provided between the semi-conductive layers 926, 930. The ISI layer 928 is provided on ITO layer 930 so as to have a tab out portion as discussed above with respect to ISI layer 328. The encapsulant 943 is provided along the edges of the tab out portion of reflective element 916, and the seal 941 is provided between the tab out portion and the ITO layer 926 on front substrate 922 and between the ITO layers 924, 926 around ISI layer 928 where there is no tab out portion.

Multiple stack ISI layer 928 comprises an adhesion layer 932 of approximately 80 nm of ITO, ICO, IWO or the like, a first metallic layer 934a of

approximately 30 nm of silver or silver alloy or the like, a layer 936a of approximately 101 nm of silicon oxide or the like, a layer 934b of approximately 60 nm of titanium oxide or the like, a layer 936b of approximately 95 nm of silicon oxide or the like, a layer 934c of approximately 161 nm of titanium oxide or the like, a layer 936c of approximately 53 nm of silicon oxide or the like, a metallic layer 934d of approximately 50 nm of silver or silver alloy or the like, and a layer 936d of approximately 72 nm of ITO, ICO or the like. As shown in FIG. 16A, such a configuration provides a transmissivity of light through the reflective element with a peak transmissivity of light having a wavelength of approximately 650 nm. The reflective element 916 is thus spectrally tuned to transmit light emitted from a red light emitting diode display 918, which emits light having a peak intensity of approximately 650 nm. The transfective reflector and multiple stack ISI layer 928 provide an extra narrow band of transmissivity for the desired spectral band or range of wavelengths being emitted by the display. Such a configuration thus may provide enhanced reflectivity of light outside of the targeted spectral band. As can be seen in FIG. 16A, reflective element 916 may also transmit spectral bands of light at certain other wavelengths or ranges of wavelengths as well, such as at approximately 410 nm and 470 nm.

In FIG. 17, a reflective element 1016 has a front substrate 1022 and a rear substrate 1024 and a display element 1018 at a rear or fourth surface of rear substrate 1024. A semi-conductive ITO layer (or the like) 1030 of approximately 30 nm is deposited on the forward or third surface of rear substrate 1024, while a semi-conductive layer 1026 (such as ITO, tin oxide or the like) is deposited on the rear or second surface of front substrate 1022. A multiple stack ISI stack or layer 1028, EC medium 1040, seal 1041 and encapsulant 1043 (around a tab out portion of the ISI layer, as discussed above) are provided between the semi-conductive layers 1026, 1030.

Multiple stack ISI layer 1028 comprises an adhesion layer 1032 of approximately 80 nm of ITO, ICO, IWO or the like, a first metallic layer 1034a of approximately 46 nm of silver or silver alloy or the like, a layer 1034b of approximately 80 nm of titanium oxide or the like, a layer 1036a of approximately 85 nm of silicon oxide or the like, a layer 1034c of approximately 188 nm of titanium oxide or the like, a layer 1036b of approximately 48 nm of silicon oxide or the like, a metallic layer 1034d of approximately 42 nm of silver or silver alloy or the like, and a layer 1036c of approximately 77 nm of ITO, ICO or the like. As shown in FIG. 17A, such a configuration provides a transmissivity of light through the reflective element with two peak transmission bands, namely, a first band

having a peak transmissivity of light having a wavelength of approximately 465 nm and a second band having a peak transmissivity of light having a wavelength of approximately 645 nm. The reflective element 1016 is thus spectrally tuned to substantially transmit light emitted from both a blue light emitting diode display 1018a, which emits light having a peak intensity of approximately 465 nm, and a red light emitting diode display 1018b, which emits light having a peak intensity of approximately 645 nm. The transfective reflector and multiple stack ISI layer 1028 provide an extra narrow band of transmissivity for each of the desired spectral bands or ranges of wavelengths being emitted by the displays. Such a configuration thus may provide enhanced reflectivity of light outside of the targeted spectral band.

Referring now to FIG. 18, an electro-optic or electrochromic mirror element 1116 comprises a pair of substrates (a front substrate 1122 is shown in FIG. 18), with an electrochromic medium (not shown) sandwiched therebetween. Electrochromic mirror element 1116 may comprise a reflective metallic layer or layers and transparent, at least partially conductive layers, such as discussed above, to provide a transfective mirror element. The electrochromic mirror element 1116 includes one or more display elements, such as the three display elements 1118a, 1118b, 1118c in FIG. 18, positioned behind the rear substrate and operable to emit or transmit light through the substrates and layers and electrochromic medium for viewing at the front substrate 1122.

The electrochromic mirror element 1116 comprises at least two regions, such as the three regions 1116a, 1116b, 1116c shown in FIG. 18. A central or principle viewing region 1116a provides a respective reflectivity and transmissivity, such as via layers or coatings as described above. One or both side regions 1116b, 1116c also provide a respective reflectivity and transmissivity. In the illustrated embodiment, the display element or elements 1118a, 1118b, 1118c are positioned at the side or display regions 1116b, 1116c. Preferably, the transmissivity in the side regions 1116b, 1116c is greater than the transmissivity in the central region 1116a, while, preferably, the reflectivity in the central region 1116a is greater than the reflectivity in the side or display regions 1116b, 1116c. The present invention thus provides greater transmissivity in the display regions to enhance viewing of the displays, while providing greater reflectivity in the central or main region of the mirror element to provide enhanced reflectivity in the principle viewing area.

In the illustrated embodiment, the transmissivity at the display regions is approximately 25%, while the transmissivity in the central or principle viewing region is

approximately 20%. Likewise, the reflectivity in the central or principle viewing region is approximately 65%, while the reflectivity in the display regions is approximately 60%. Other reflective and transmissive characteristics may be achieved without affecting the scope of the present invention.

5 The difference in the reflectivity and transmissivity between the regions is achieved by selecting different combinations of vapor source and masking of the regions to achieve the desired effect. For example, the thicknesses of different layers of the conductive metallic layer or layers and of the transparent, at least partially conductive layers may be selected or adjusted across the mirror element to achieve a desired amount of transmissivity
10 at the display regions, while maintaining sufficient reflectivity in these regions, and to achieve a desired or optimum or maximum reflectivity at the central or principle viewing area or region of the mirror element. For example, a reflective metallic coating or layer may be thicker at the principle viewing region than at the display region or regions, while a transparent layer or coating may be thinner at the principle viewing region than at the display
15 region or regions. Although shown as having display regions at the side regions of the mirror element, clearly displays and associated display regions providing enhanced transmissivity may be positioned elsewhere around the mirror element, without affecting the scope of the present invention.

 Therefore, the reflective element or mirror element of the present invention
20 allows for a display element to be positioned behind the reflective layer and transmits light from the display element through the mirror element, while providing sufficient reflectivity across the entire mirror element and not requiring any windows or thinned areas of reduced reflectivity in the display region. The present invention thus provides an electrochromic mirror assembly which may include multiple display-on-demand type displays or display-on-
25 need type displays, without adversely affecting the reflective nature of the reflective element. Furthermore, the transmissivity of the ISI stack or layer or the multiple stack ISI layers of the transreflective reflector of the present invention may match or pinpoint the particular spectral band corresponding to the light emitted by the display element or device, in order to provide improved transmission of the display information or light through the stack (and thus through
30 the reflective element), while providing a desired neutral reflectance over the entire surface of the reflector. The present invention thus may provide a reflective element which has a transmissivity level of greater than at least approximately 20 percent, more preferably at least approximately 30 percent, and most preferably at least approximately 50 percent, for light

within a particular narrow spectral band or range of wavelengths, while providing substantial reflectance of light outside of the particular, selected spectral band or range of wavelengths. The reflective element of the present invention also provides for generally uniform thickness of the ISI layers, since none of the layers have to be etched or masked or reduced in
5 thicknesses to allow for the display to transmit therethrough, thereby enhancing the manufacturing processing of the reflective element.

As discussed above, the mirror assembly of the present invention may include a display for providing information for viewing by the driver of the vehicle on the reflective element so that the driver can easily see the display. In order to maintain easy viewing of the
10 display, it is desirable to adjust the display intensity in response to ambient light levels (in order to avoid washout during daytime driving conditions and glare during nighttime driving conditions) and in response to the degree of transmissivity of the electrochromic reflective element. For example, in low lighting conditions, such as during the nighttime, the intensity of the display may be dimmed to avoid glare, while in higher lighting conditions, such as
15 during the daytime, the intensity of the display may be increased to provide sufficient visibility of the display to the driver of the vehicle. The mirror assembly may include light sensors for sensing the ambient light in the cabin of the vehicle or at the mirror assembly and may include a control which is operable to automatically adjust the display intensity and/or the transmissivity of the electrochromic medium in response to the ambient light sensors.

Further, automatic dimming circuitry used in electrochromic mirror
20 assemblies utilizing the reflective elements of the current invention may utilize one or more (typically two) photo sensors to detect glaring and/or ambient lighting. For example, a silicon photo sensor such as a TSL235R Light-to-Frequency converter (available from Texas Advanced Optoelectronic Solutions Inc. of Plano, TX) can be used as such photo sensors.
25 Such light-to-frequency converters comprise the combination of a silicon photodiode and a current-to-frequency converter on a single monolithic CMOS integrated circuit.

The mirror assembly or assemblies of the present invention may also include or house a plurality of electrical or electronic devices, such as antennas, including global positioning system (GPS) or cellular phone antennas, such as disclosed in U.S. Pat. No.
30 5,971,552, a communication module, such as disclosed in U.S. Pat. No. 5,798,688, displays, such as shown in U.S. Pat. Nos. 5,530,240 and 6,329,925, blind spot detection systems, such as disclosed in U.S. Pat. Nos. 5,929,786 or 5,786,772, transmitters and/or receivers, such as garage door openers, a digital network, such as described in U.S. Pat. No. 5,798,575, a

high/low head lamp controller, such as disclosed in U.S. Pat. No. 5,715,093, a memory mirror system, such as disclosed in U.S. Pat. No. 5,796,176, a hands-free phone attachment, a video device for internal cabin surveillance and/or video telephone function, such as disclosed in U.S. Pat. Nos. 5,760,962 and 5,877,897, a remote keyless entry receiver, map lights, such as
5 disclosed in U.S. Pat. Nos. 5,938,321; 5,813,745; 5,820,245; 5,673,994; 5,649,756; or 5,178,448, microphones, such as disclosed in U.S. Pat. Nos. 6,243,003 and 6,278,377, speakers, a compass, such as disclosed in U.S. Pat. No. 5,924,212, seat occupancy detector, a trip computer, an ONSTAR[®] system or the like (with all of the above-referenced patents commonly assigned to Donnelly Corporation, and with the disclosures of the referenced
10 patents being hereby incorporated herein by reference in their entirety).

The mirror assembly and/or reflective element of the present invention may include a printed circuit board (PCB) which may be attached to its rear surface (e.g. the fourth surface) by, for example, a suitable adhesive or the like. An example of such an arrangement is disclosed in commonly assigned U.S. Pat. No. 5,820,245, which is
15 incorporated in its entirety by reference herein. The PCB optionally may include glare sensing and ambient photo sensors and electrochromic circuitry that automatically dims the reflectivity of the electrochromic mirror element when glare conditions are detected, such as at nighttime or the like. Alternately, the PCB may be snap connected, by a clip or otherwise attached, to a plastic plate that itself is adhered to the electrochromic element.

The printed circuit board may include electronic or electrical circuitry for actuating the variable reflectance of the reflective element and for operating other electrical or electronic functions supported in the rearview mirror assembly. The circuit board may support, for example, light emitting diodes (LEDs) for illuminating indicia on display elements provided on the chin of the bezel of the mirror assembly or display devices provided
25 on the reflective element, or map or dash board lights or the like. The circuit board may be independently supported from the reflective element or in the casing or may be mounted to the reflective element's rear or fourth surface on a separate plate or may be directly adhered to the rear surface by a suitable adhesive. Reference is made to U.S. Pat. Nos. 5,671,996 and 5,820,245, the disclosures of which are hereby incorporated herein by reference in their
30 entirety.

Therefore, the present invention provides a third surface reflective element which provides a combination of conductive or semi-conductive layers and a conductive metallic layer or layers on the inward surface of a second substrate of the reflective element.

The reflective element of the present invention provides enhanced manufacturing processing of the reflective element, since the thicknesses of the layers and tolerances associated therewith are sufficiently large enough to be sputter coated or otherwise deposited via a low cost process. The reflective element of the present invention also provides for a reflective and transmissive element which allows transmission of display information through the reflective element, while still providing sufficient reflectance over the entire surface of the reflective element, even in the display area. Accordingly, multiple displays may be positioned on, at or around the reflective element, without loss of reflectivity of the element. The materials and thicknesses of the layers of the reflective element may be selected to spectrally tune the reflective element to allow transmission of a particular spectral band or range of wavelengths, in order to tune the reflective element for use with a particular spectral band of light being emitted by a particular display. Also, the thicknesses of one or more layers may be varied across the mirror element to provide regions or areas of increased transmissivity for a display, while maintaining a desired level of reflectivity at the principle viewing area of the mirror element.

Changes and modifications in the specifically described embodiments can be carried out without departing from the principles of the invention, which is intended to be limited only by the scope of the appended claims, as interpreted according to the principles of patent law.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. An electrochromic mirror assembly for a vehicle, said mirror assembly comprising:
an electrochromic mirror element comprising a first substrate having first and second
surfaces and a second substrate having third and fourth surfaces, said first and second
substrates being arranged so that said second surface opposes said third surface with an
5 electrochromic medium disposed therebetween;
said third surface of said second substrate comprising a transflective reflector
comprising a first substantially transparent semi-conducting non-metallic layer contacting the
electrochromic medium, a second substantially transparent semi-conducting non-metallic
layer, and a substantially reflecting metallic conducting layer sandwiched between said first
10 and second substantially transparent semi-conducting non-metallic layers, wherein when said
mirror element is viewed from outside said first surface, said mirror element is substantially
spectrally untinted when no voltage is applied across said electrochromic medium, said
mirror element being at least partially spectrally selective in transmission and exhibiting a
spectrally selective transmission characteristic, said spectrally selective transmission
15 characteristic being established by the refractive indices and physical thicknesses of said first
and second substantially transparent semi-conducting non-metallic layers and said
substantially reflective metallic conducting layer; and
a light emitting display disposed at said fourth surface of said second substrate and
operable to emit light having an emitted spectral characteristic through said mirror element,
20 wherein said transflective reflector is configured to exhibit a spectrally selective transmission
characteristic so as to substantially transmit light having a spectral band in regions at or near
said emitted spectral characteristic and to substantially reflect other light having a spectral
band outside of said regions.
2. The electrochromic mirror assembly of claim 1, wherein said transflective reflector
provides at least 20 percent transmissivity of light at or near said emitted spectral
characteristic.

3. The electrochromic mirror assembly of claim 1, wherein said transflective reflector provides at least 20 percent transmissivity of light at or near said emitted spectral characteristic.
4. The electrochromic mirror assembly of claim 2, wherein said transflective reflector provides at least 60 percent photopic reflectance of other light.
5. The electrochromic mirror assembly of claim 2, wherein said transflective reflector provides at least 70 percent photopic reflectance of other light.
6. The electrochromic mirror assembly of claim 2, wherein said transflective reflector provides at least 80 percent photopic reflectance of other light.
7. The electrochromic mirror assembly of claim 4, wherein said transflective reflector provides at least 15 percent transmissivity of light at or near said emitted spectral characteristic.
8. The electrochromic mirror assembly of claim 4, wherein said transflective reflector provides at least 20 percent transmissivity of light at or near said emitted spectral characteristic.
9. The electrochromic mirror assembly of claim 4, wherein said transflective reflector provides at least 30 percent transmissivity of light at or near said emitted spectral characteristic.
10. The electrochromic mirror assembly of claim 1, wherein said second substantially transparent semi-conducting non-metallic layer contacts said third surface of said second substrate.
11. The electrochromic mirror assembly of claim 1, wherein said transflective reflector comprises two substantially reflective metallic conducting layers, each of said two substantially reflective metallic conducting layers being sandwiched between a respective

pair of substantially transparent semi-conducting non-metallic layers disposed between said
5 electrochromic medium and said second substrate.

12. An electrochromic mirror assembly for a vehicle, said mirror assembly comprising:
an electrochromic mirror element comprising a first substrate having first and second
surfaces and a second substrate having third and fourth surfaces, said first and second
substrates being arranged so that said second surface opposes said third surface, said mirror
5 element comprising an electrochromic medium disposed between said second substrate and
said first substrate, wherein said mirror element comprises a transfective reflector at said
third surface, said transfective reflector comprising at least one conductive metallic reflective
layer sandwiched between first and second substantially transparent semi-conducting non-
metallic layers, said first substantially transparent semi-conducting non-metallic layer
10 contacting said electrochromic medium; and
a display at said fourth surface of said second substrate, each of said first and second
substantially transparent semi-conducting non-metallic layers and said substantially reflective
metallic conducting layer having a selected refractive index and a selected physical thickness
such that said transfective reflector is selectively spectrally tuned to substantially transmit at
15 least one preselected spectral band of visible light therethrough while substantially reflecting
other visible light, said display being configured to emit visible light with a peak intensity
within said preselected spectral band.

13. The electrochromic mirror assembly of claim 12, wherein said second substantially
transparent semi-conducting non-metallic layer contacts said third surface of said second
substrate.

14. The electrochromic mirror assembly of claim 12, wherein said transfective reflector
comprises two substantially reflective metallic conducting layers, each of said two
substantially reflective metallic conducting layers being sandwiched between a respective
pair of substantially transparent semi-conducting non-metallic layers disposed between said
5 electrochromic medium and said second substrate.

15. An electrochromic mirror assembly for a vehicle, said mirror assembly comprising:
an electrochromic mirror element comprising a first substrate having first and second
surfaces and a second substrate having third and fourth surfaces, said first and second
substrates being arranged so that said second surface opposes said third surface with an
5 electrochromic medium disposed therebetween;
said third surface of said second substrate comprising at least one conductive metallic
layer and at least one transparent, at least partially conductive layer, wherein said layers
define first and second regions of said transfective reflector, said first region having a first
reflectivity and a first transmissivity and said second region having a second reflectivity and a
10 second transmissivity, said second transmissivity being greater than said first transmissivity;
and
a display element positioned at said fourth surface of said second substrate and
operable to transmit light through said second region of said transfective reflector.
16. The electrochromic mirror assembly of claim 15, wherein said first reflectivity is
greater than said second reflectivity.
17. The electrochromic mirror assembly of claim 16, wherein said first reflectivity
comprises at least approximately 60%.
18. The electrochromic mirror assembly of claim 15, wherein said first region comprises
a generally central region of said electrochromic mirror element and said second region
comprises at least one side region of said electrochromic mirror element.
19. The electrochromic mirror assembly of claim 15, wherein said electrochromic mirror
element comprises a transfective reflector comprising a first substantially transparent semi-
conducting non-metallic layer contacting the electrochromic medium, a second substantially
transparent semi-conducting non-metallic layer, and a substantially reflecting metallic
5 conducting layer sandwiched between said first and second substantially transparent semi-
conducting non-metallic layers.
20. The electrochromic mirror assembly of claim 19, wherein a thickness of at least one
of said layers is varied between said first and second regions.


**PROVISIONAL
DON01 P-1045**

Express Mail No. EV099083873US

ELECTROCHROMIC MIRROR ASSEMBLY

ABSTRACT OF THE DISCLOSURE

An electrochromic mirror assembly for a vehicle includes an electrically variable reflective element. The reflective element includes a first substrate having first and second surfaces and a second substrate having third and fourth surfaces. The first and second substrates are arranged so that the second surface opposes the third surface. The second substrate includes a conductive stack on the third surface and an electrochromic medium between the stack and the second surface. The conductive stack comprises first and second substantially transparent semi-conducting non-metallic layers and a substantially reflecting metallic conducting layer of metallic material sandwiched between the first and second semi-conducting layers. The refractive indices and thicknesses of the first and second substantially transparent semi-conducting non-metallic layers and the substantially reflecting metallic conducting layer are selected to spectrally tune the reflective element to transmit a spectral band of visible light therethrough while substantially reflecting other visible light.

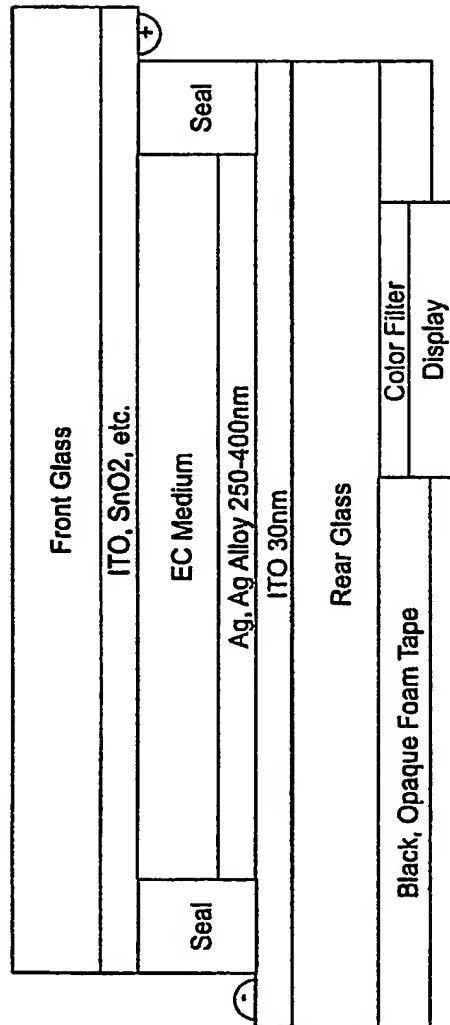

PRIOR ART

Figure 1

2014-01-16 11:05:00

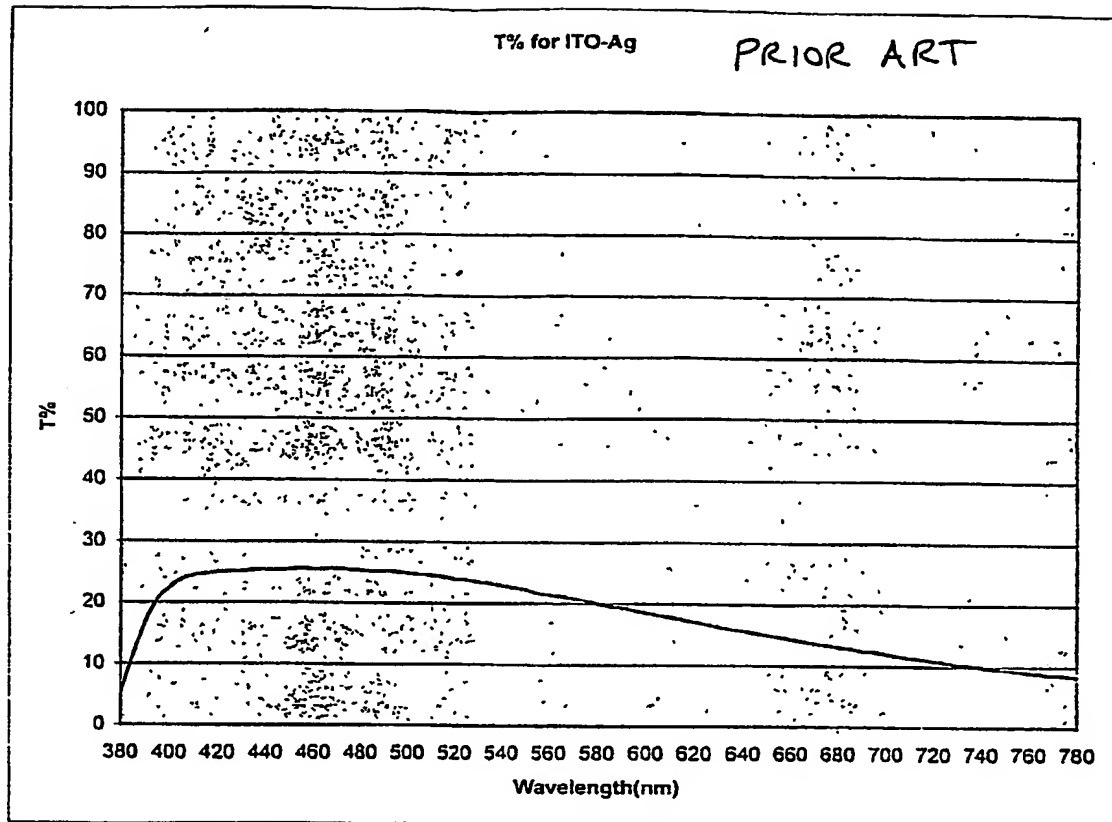
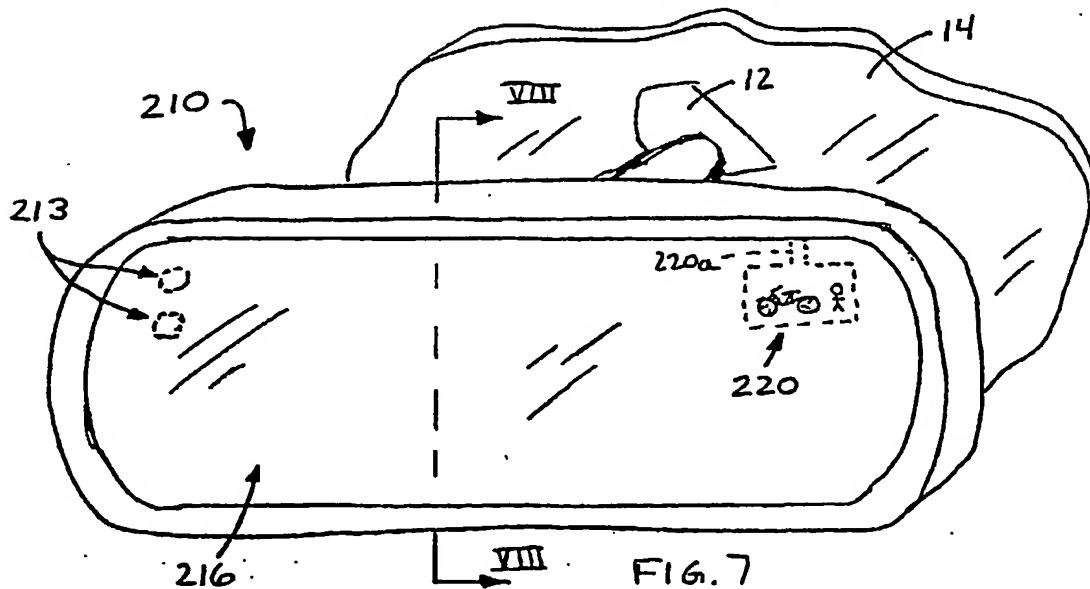
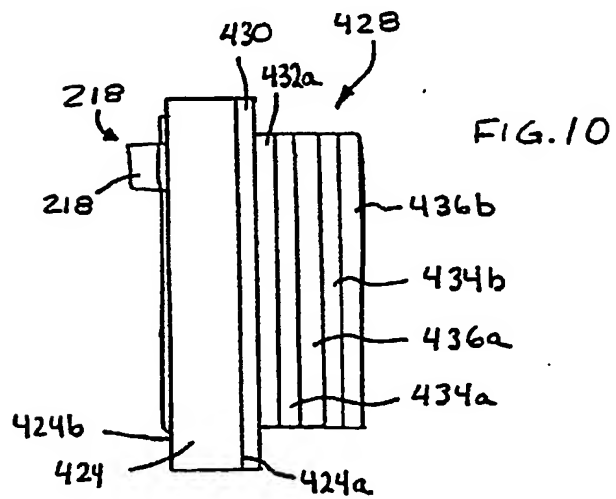
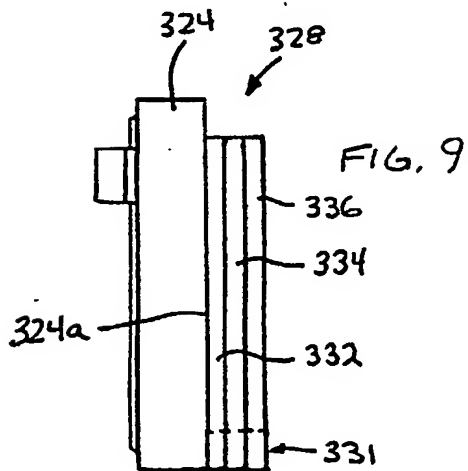
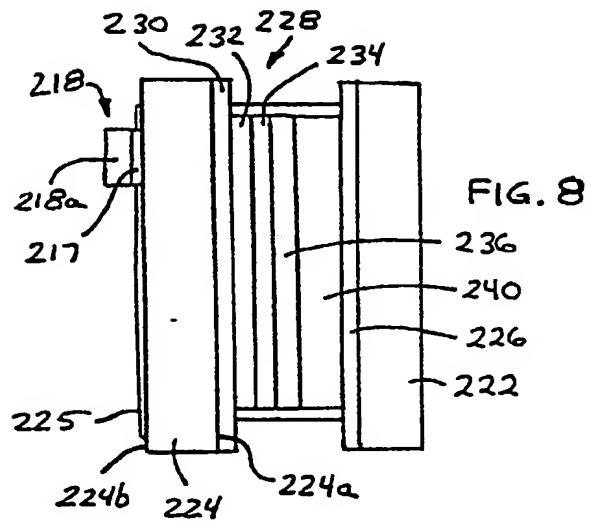
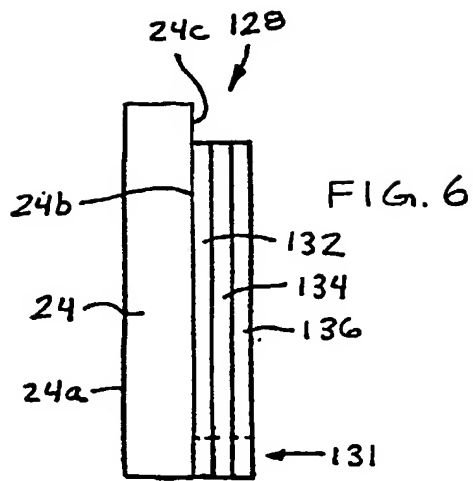


FIG. 1A



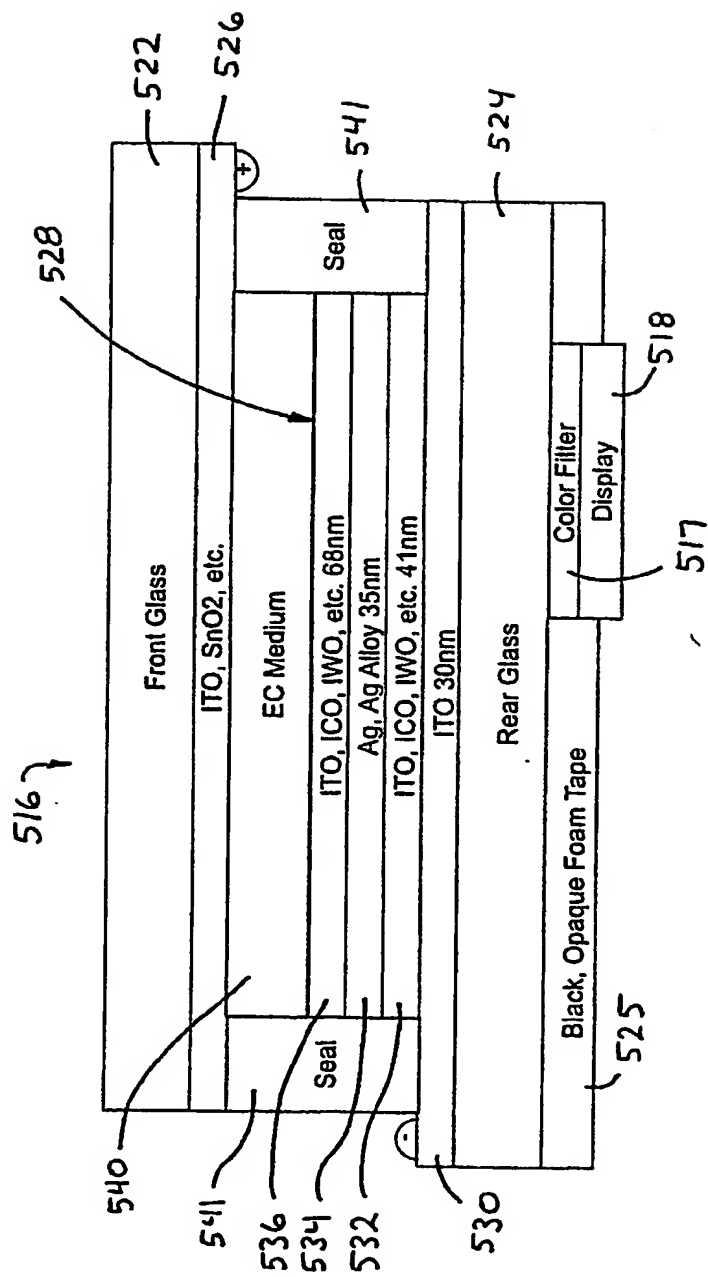


Figure 11


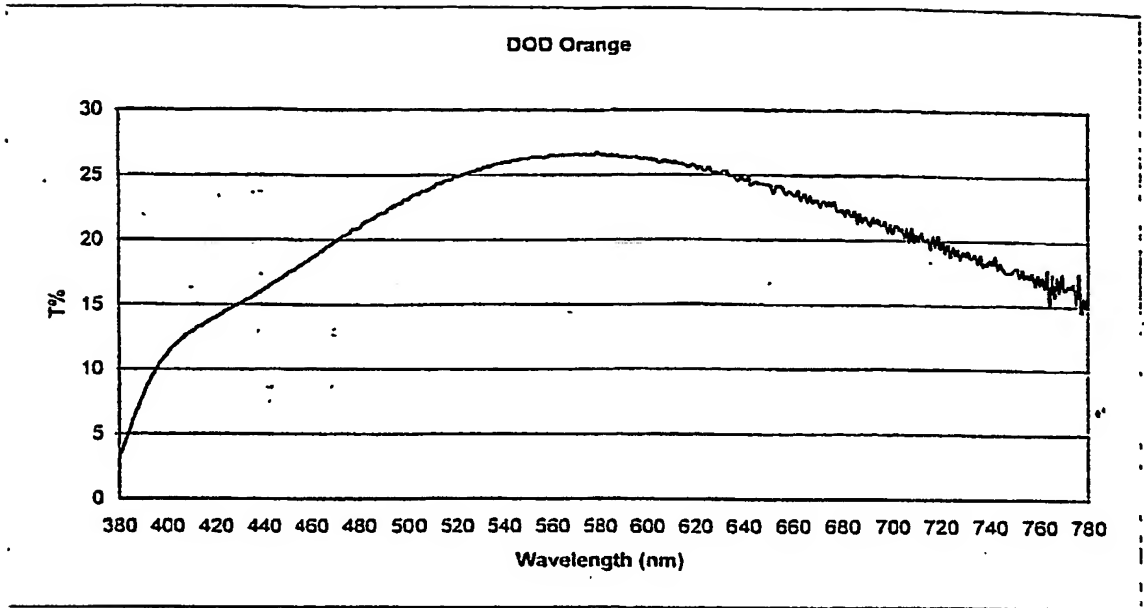


FIG. 11A

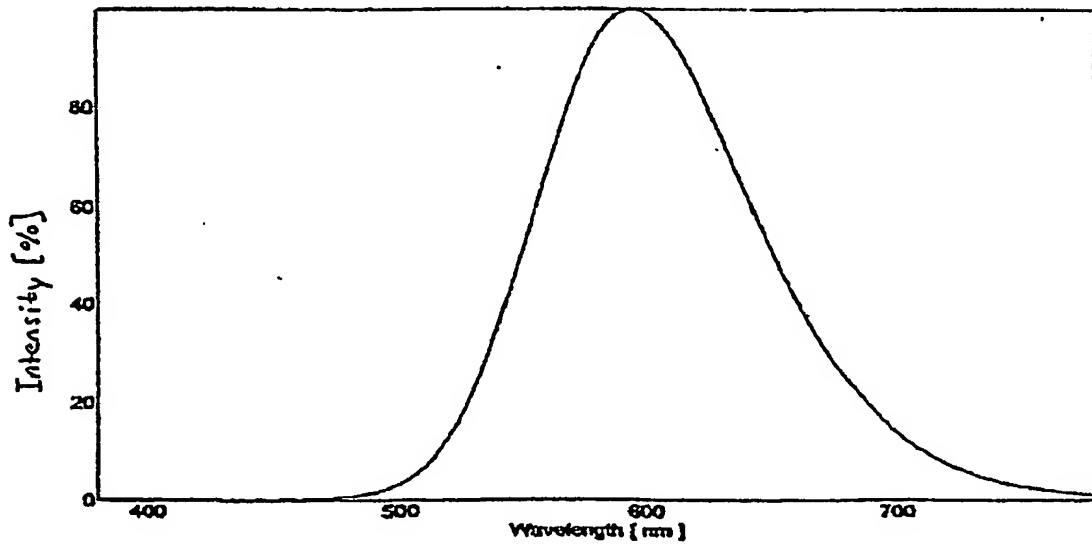

Orange VF

Emission spectrum

Improved DOD, tuned to Orange VF display

FIG. 11B

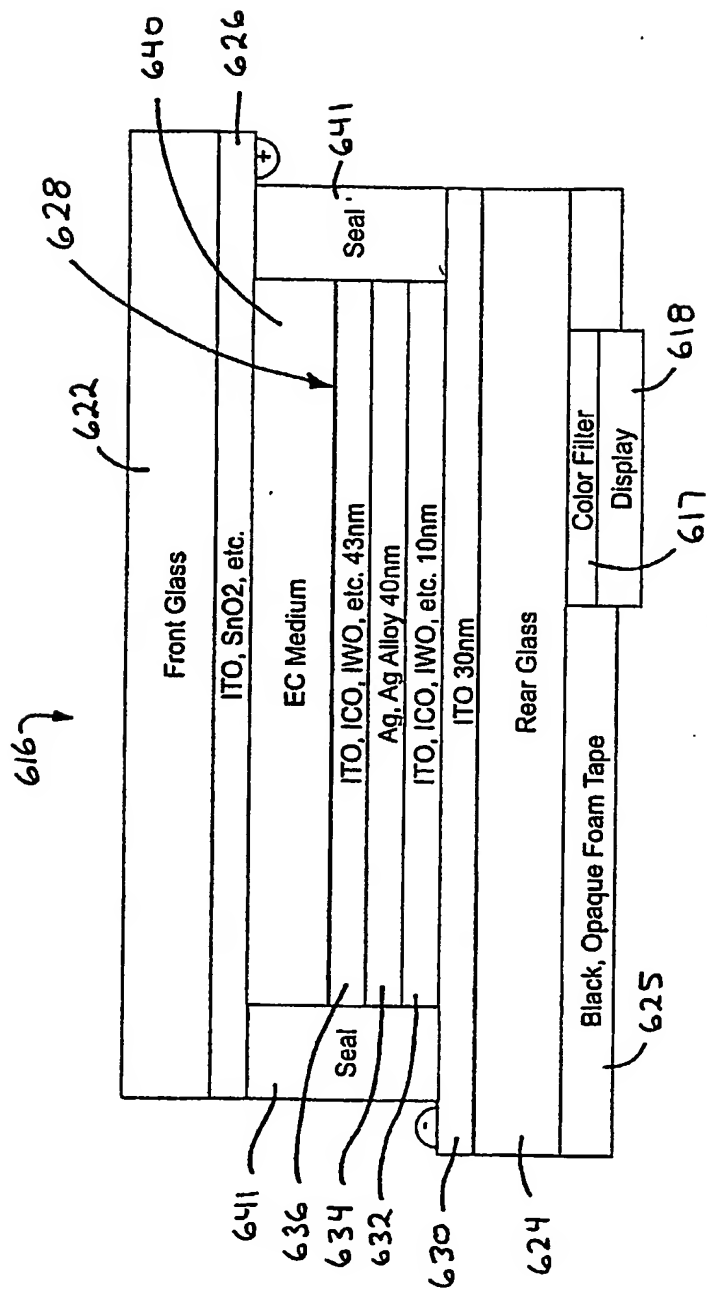


Figure 12


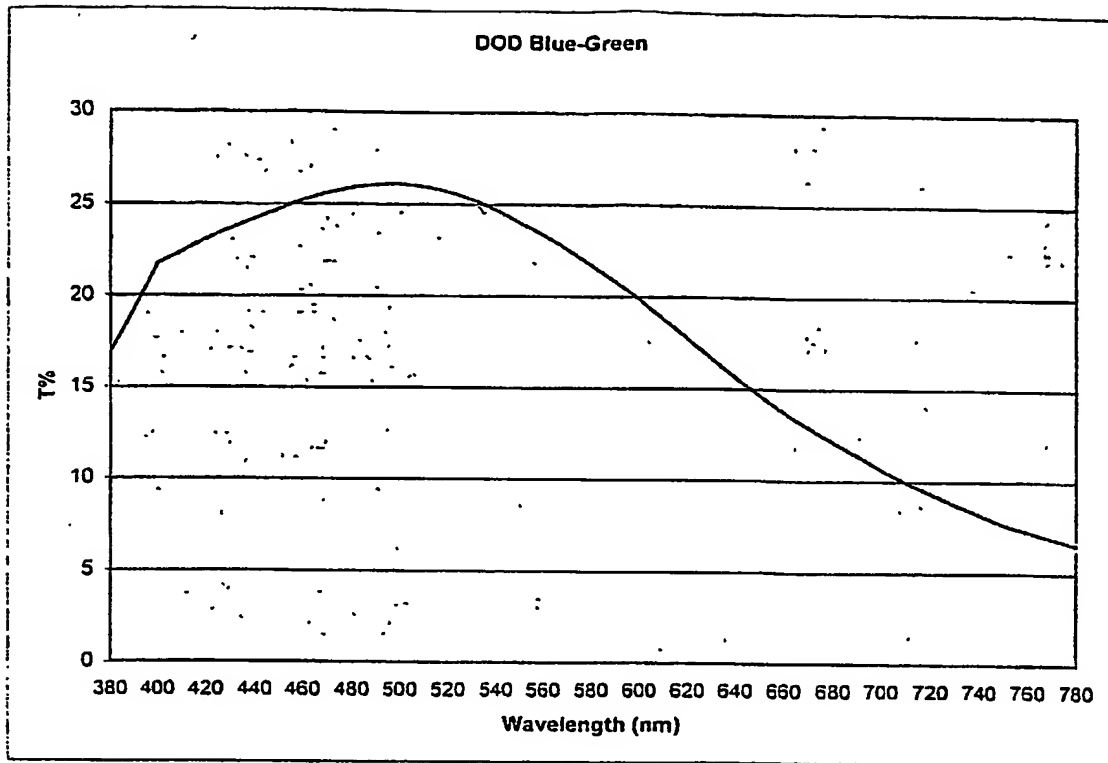


FIG. 12A

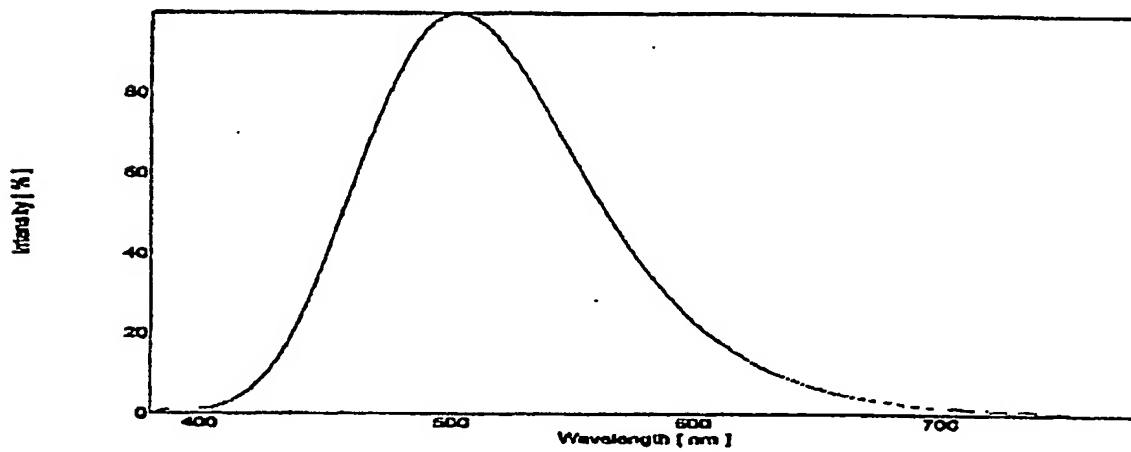

Blue-Green VF display: Emission spectrum
Improved DOD tuned to Blue-Green VF display

FIG. 12B

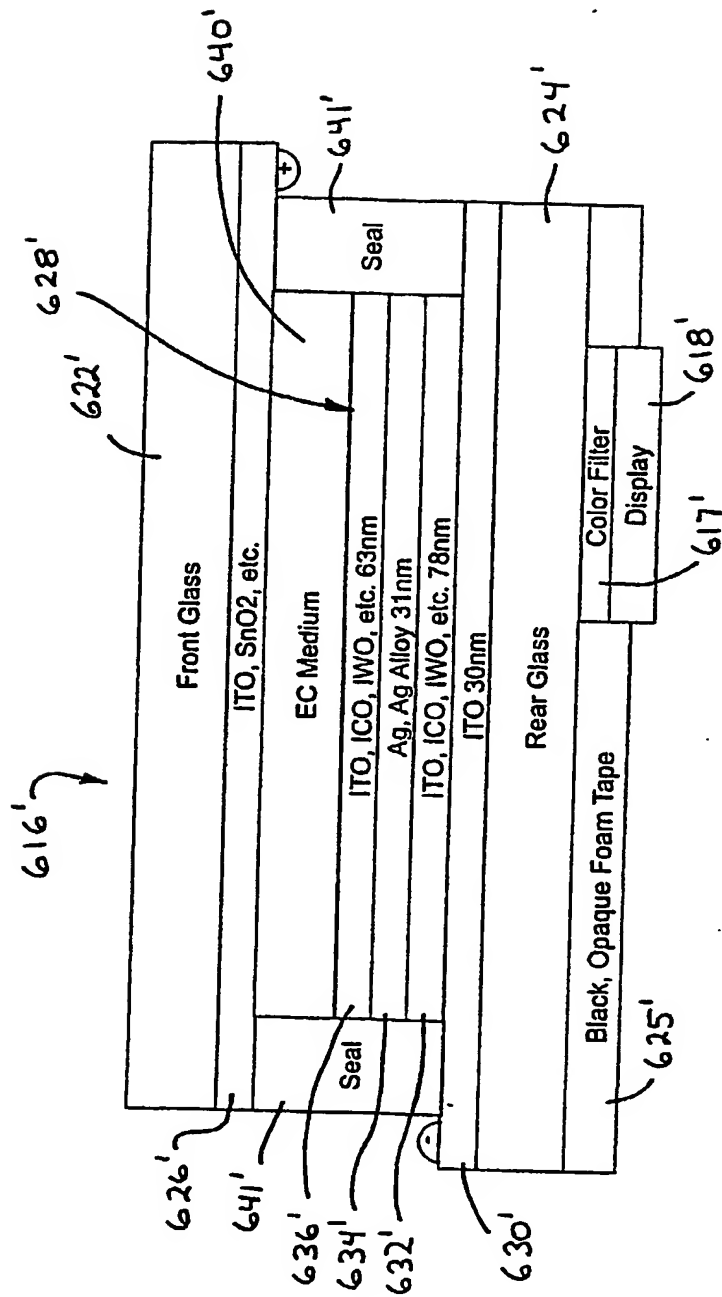


Figure 13

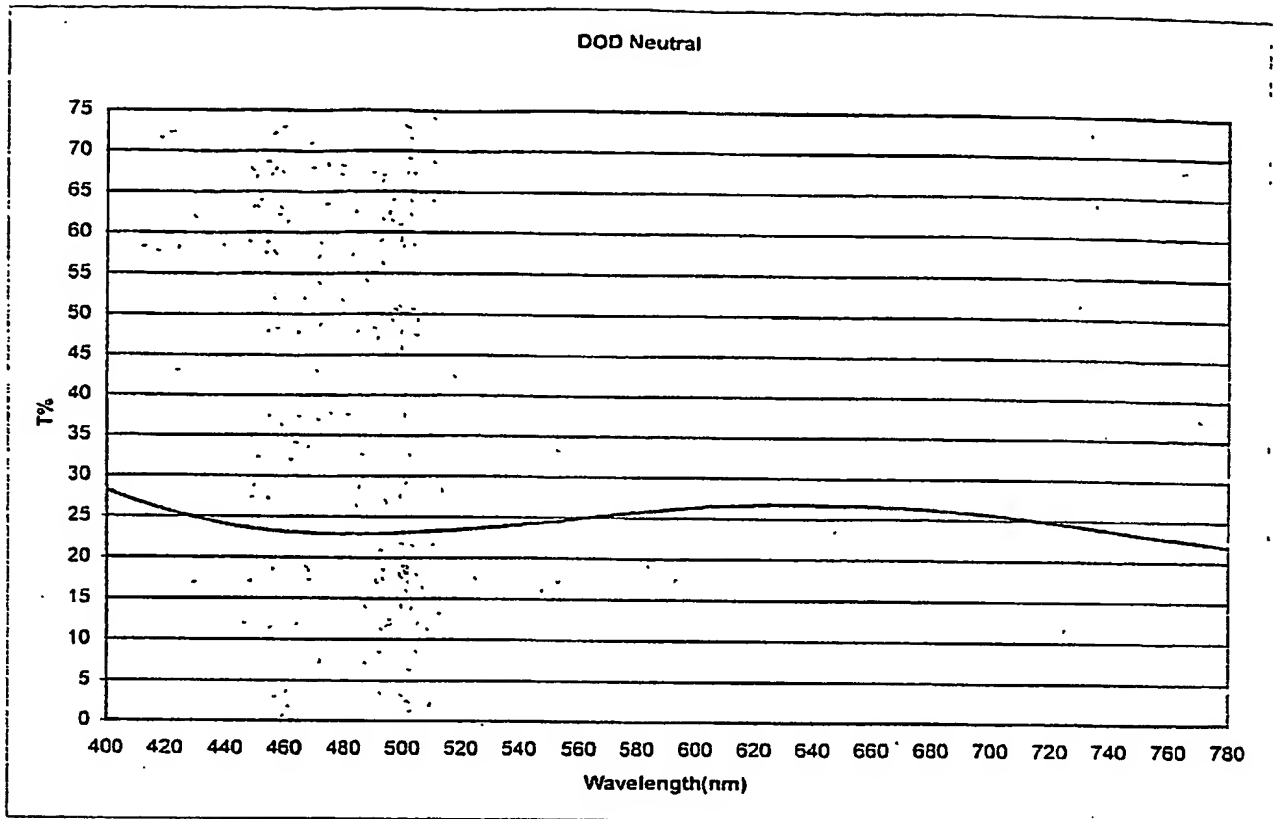


FIG. 13A

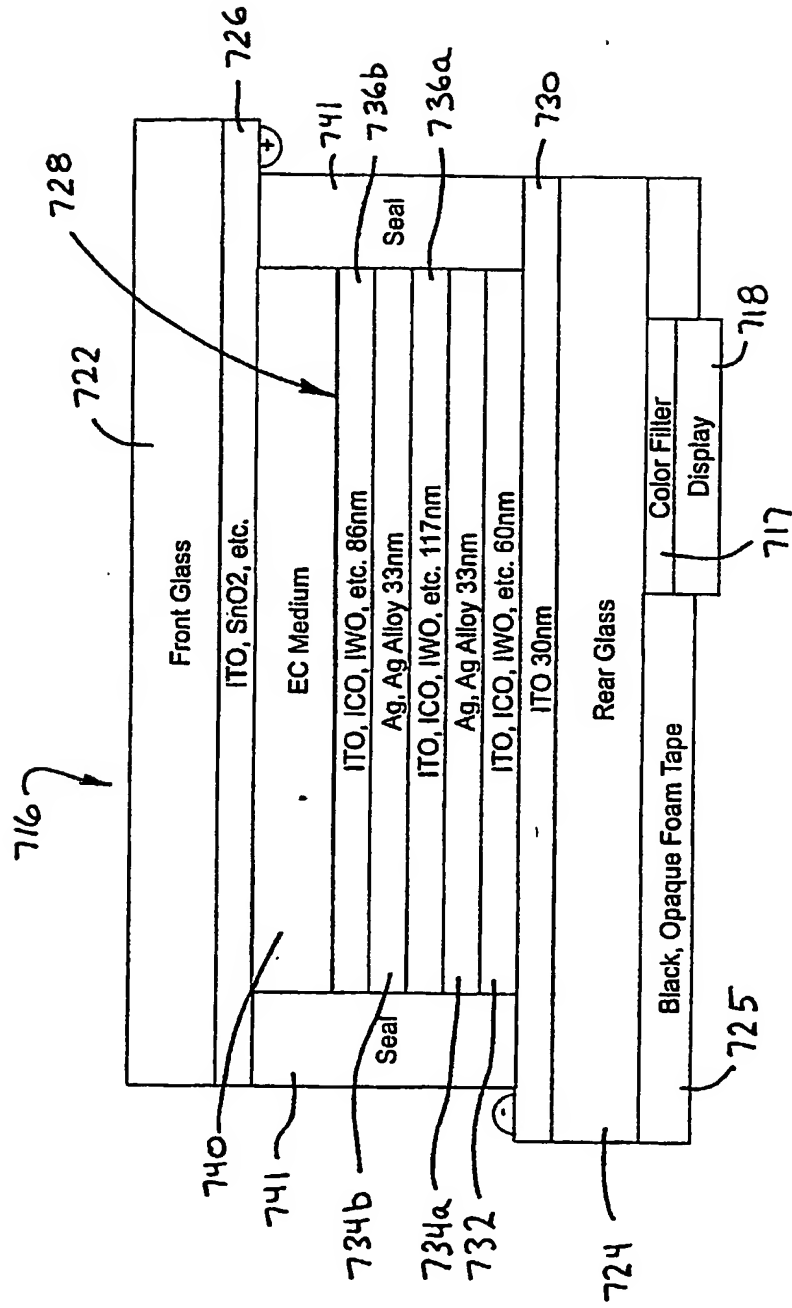


Figure 14

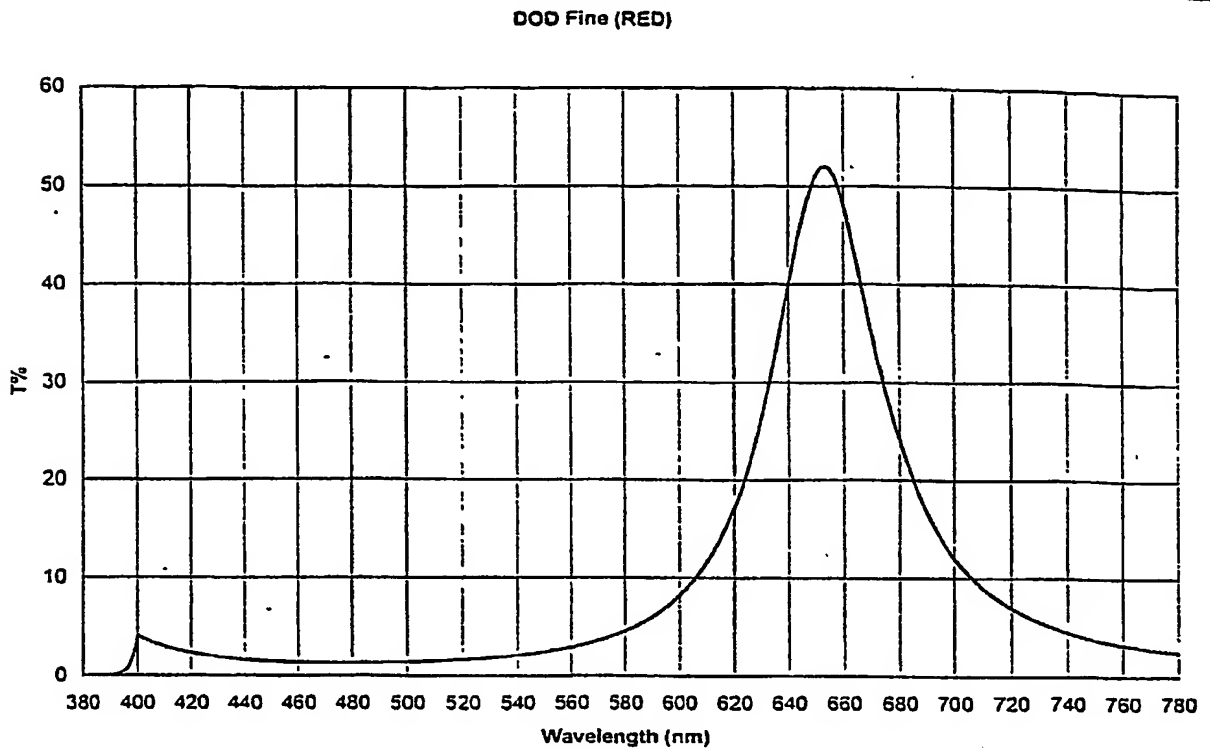


FIG. 14A

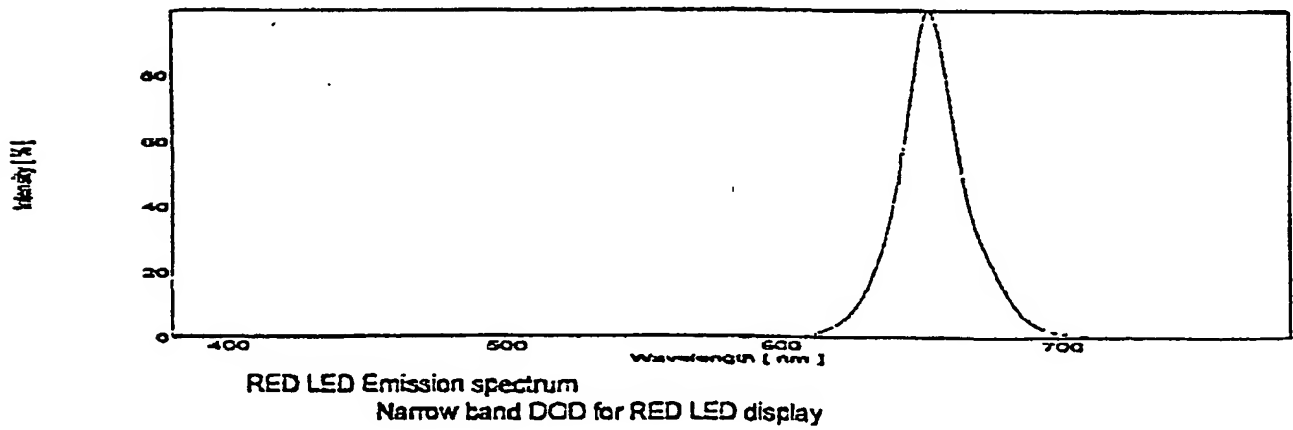


FIG. 14B

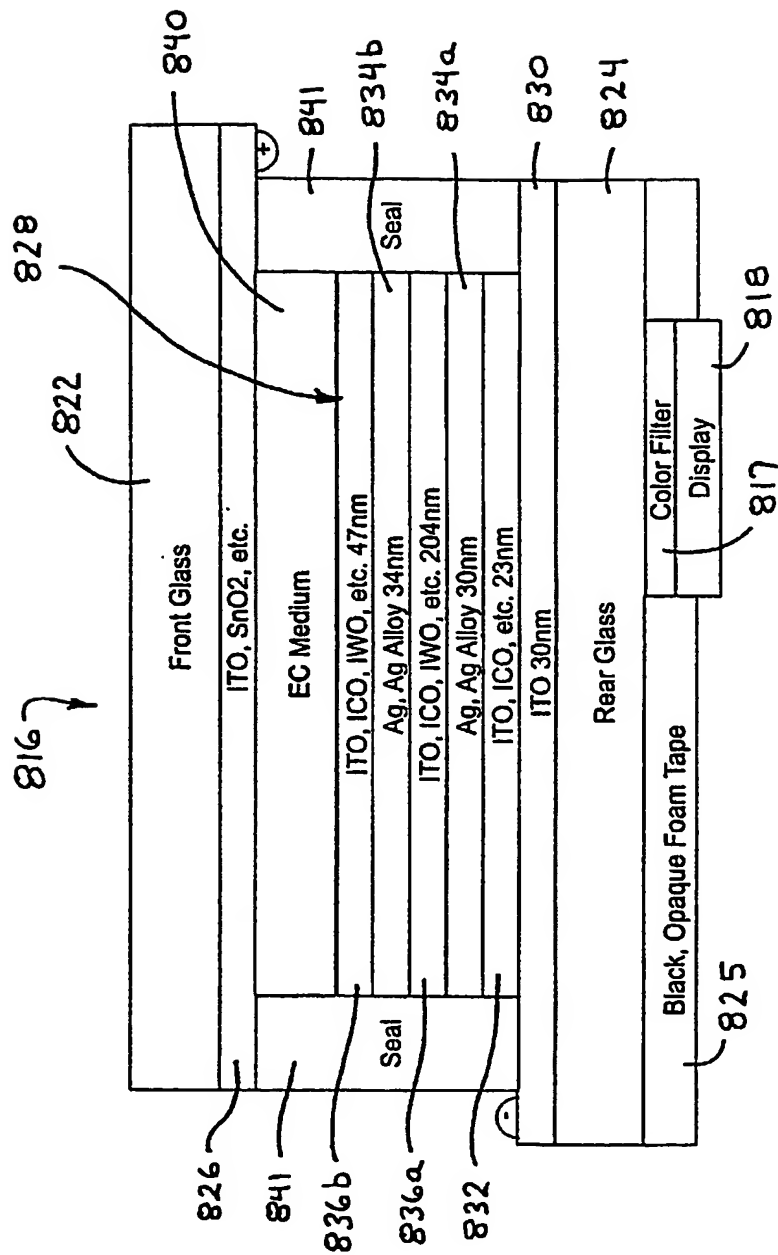


Figure 15

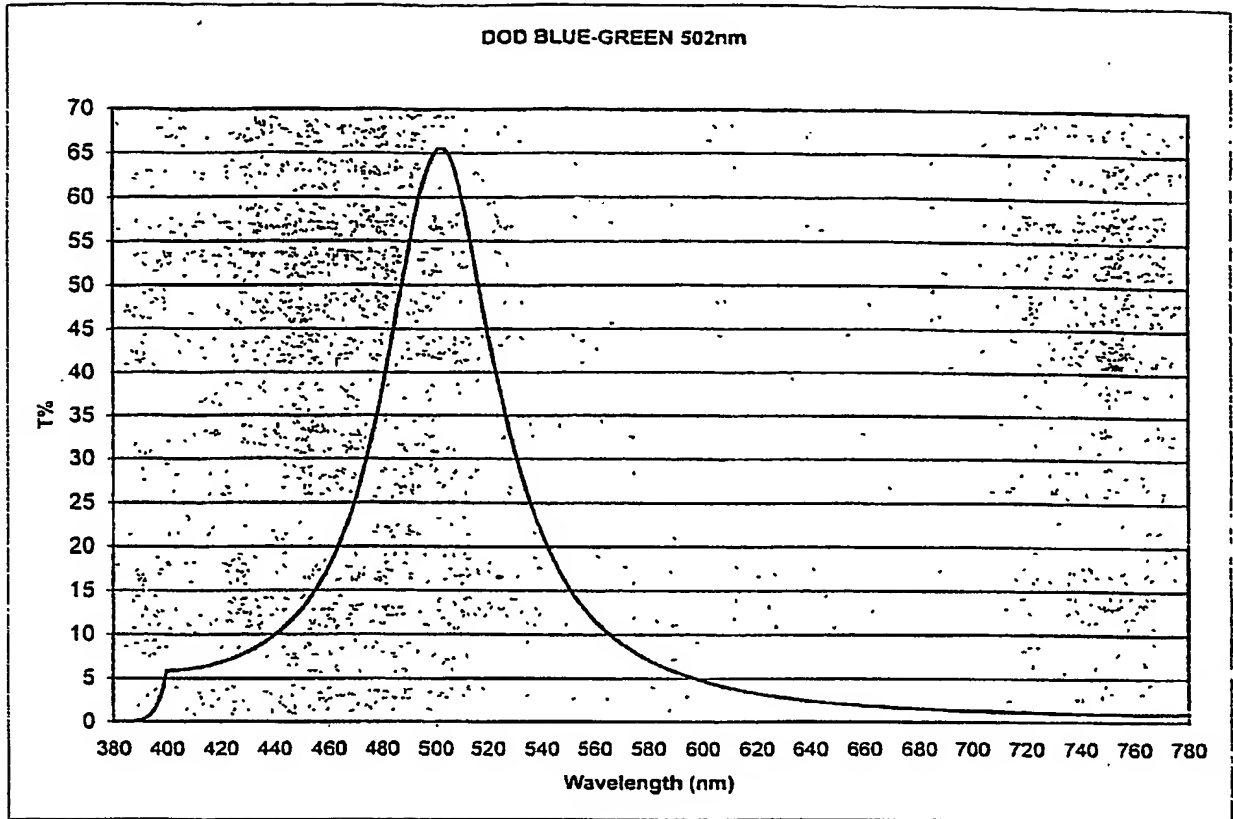


FIG. 15A

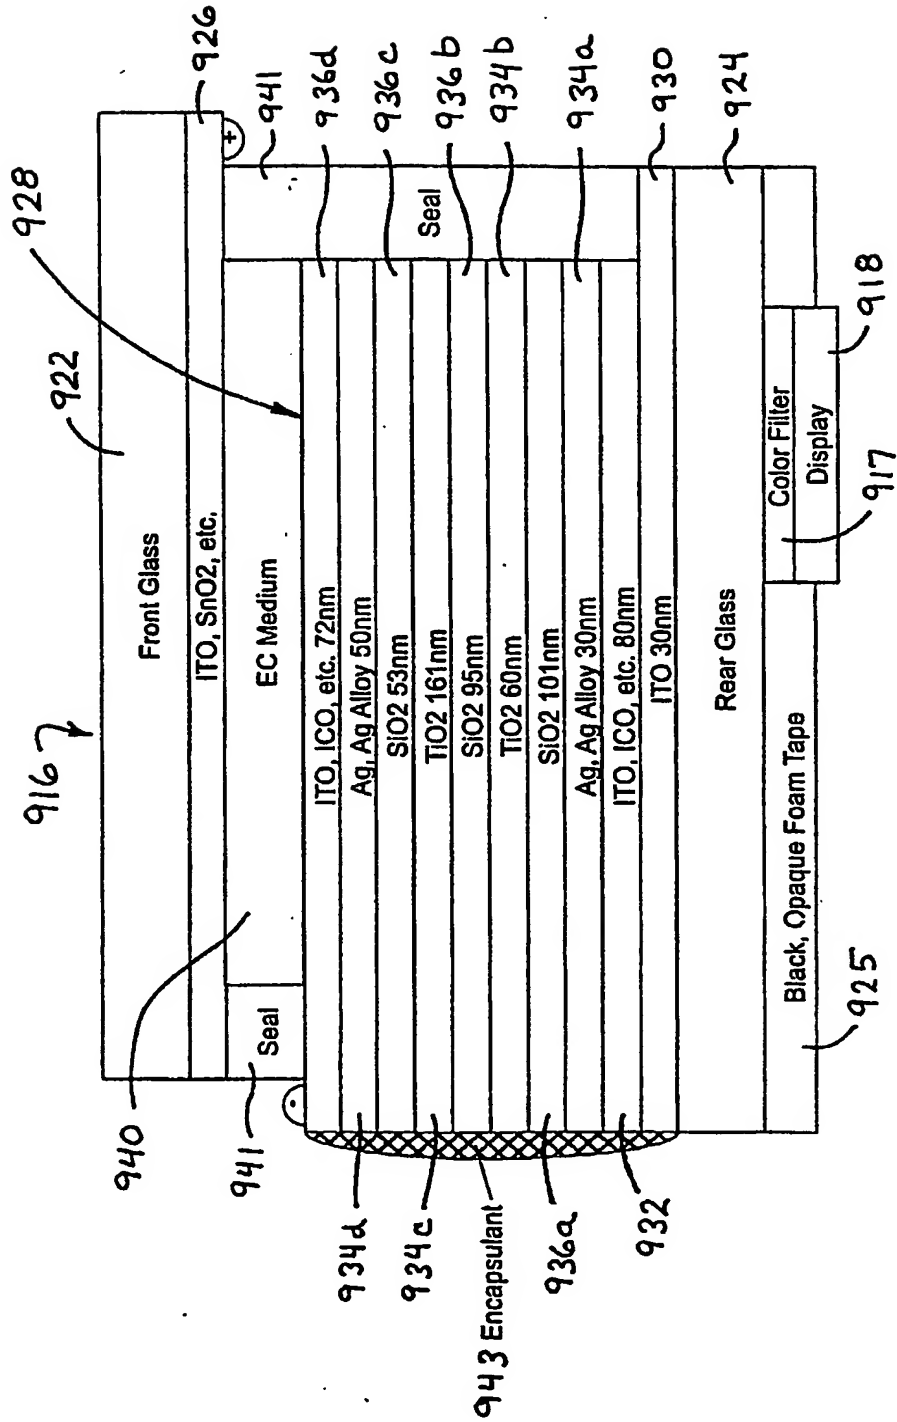


Figure 16

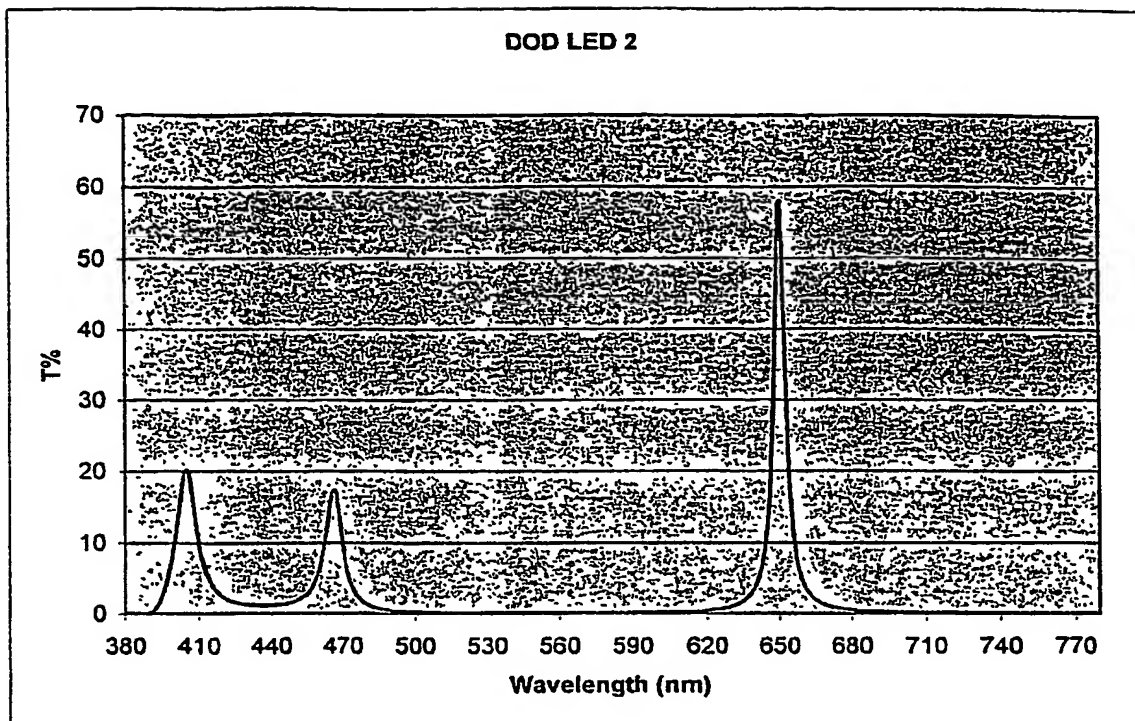


FIG. 16A

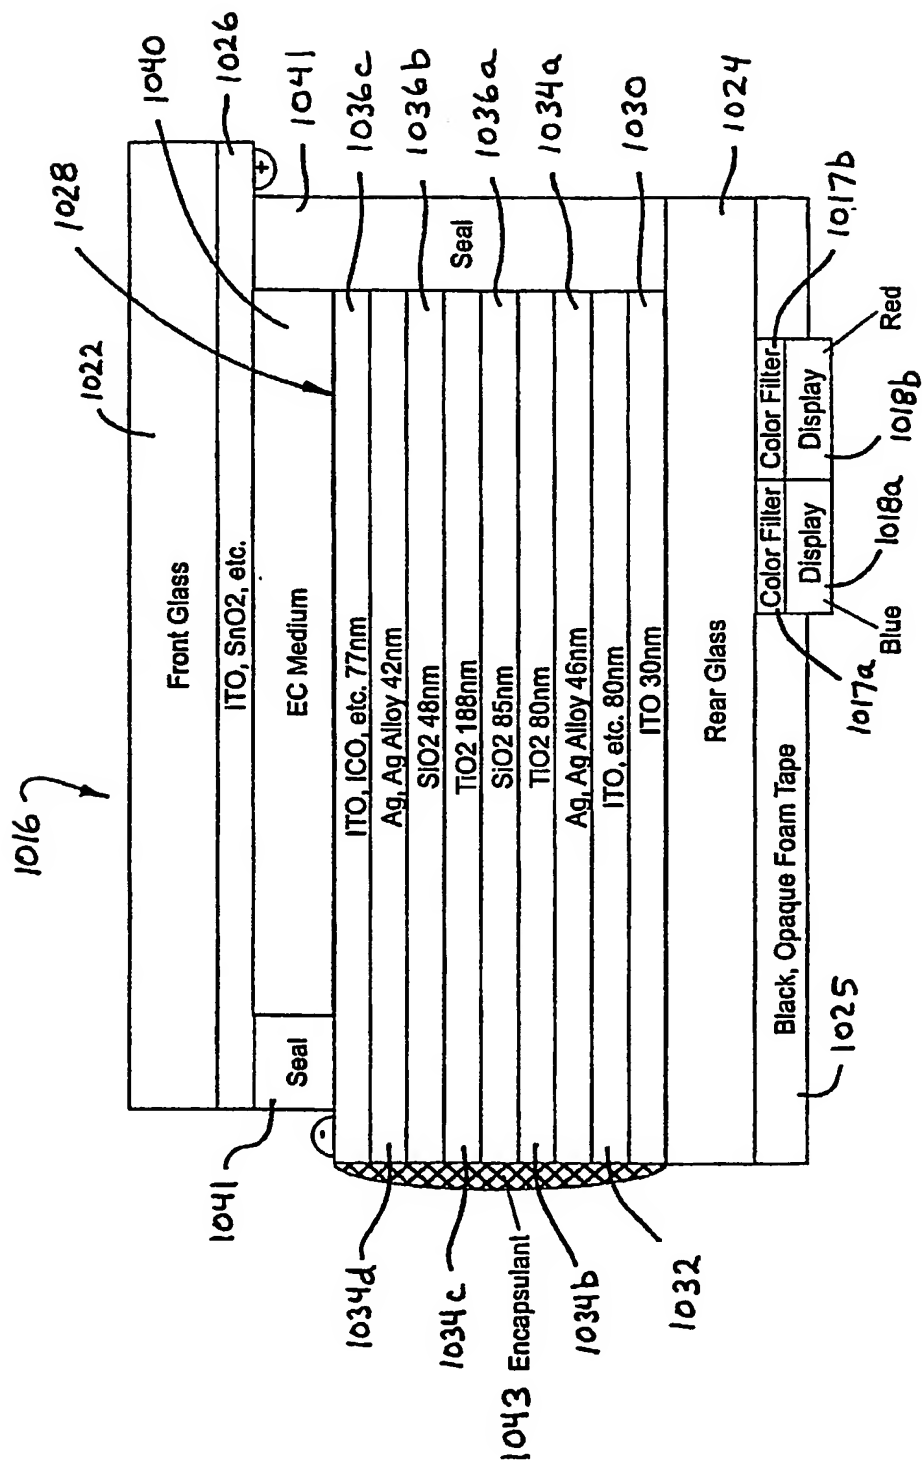


Figure 17

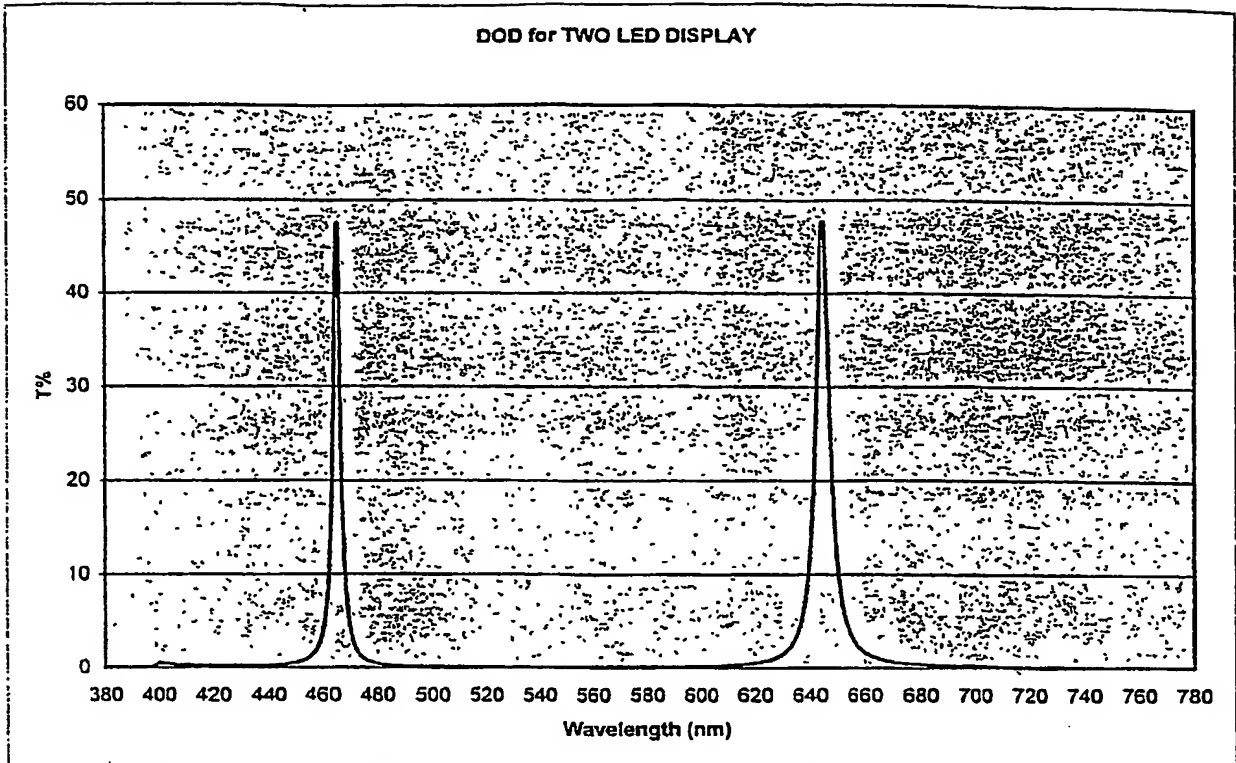


FIG. 17A

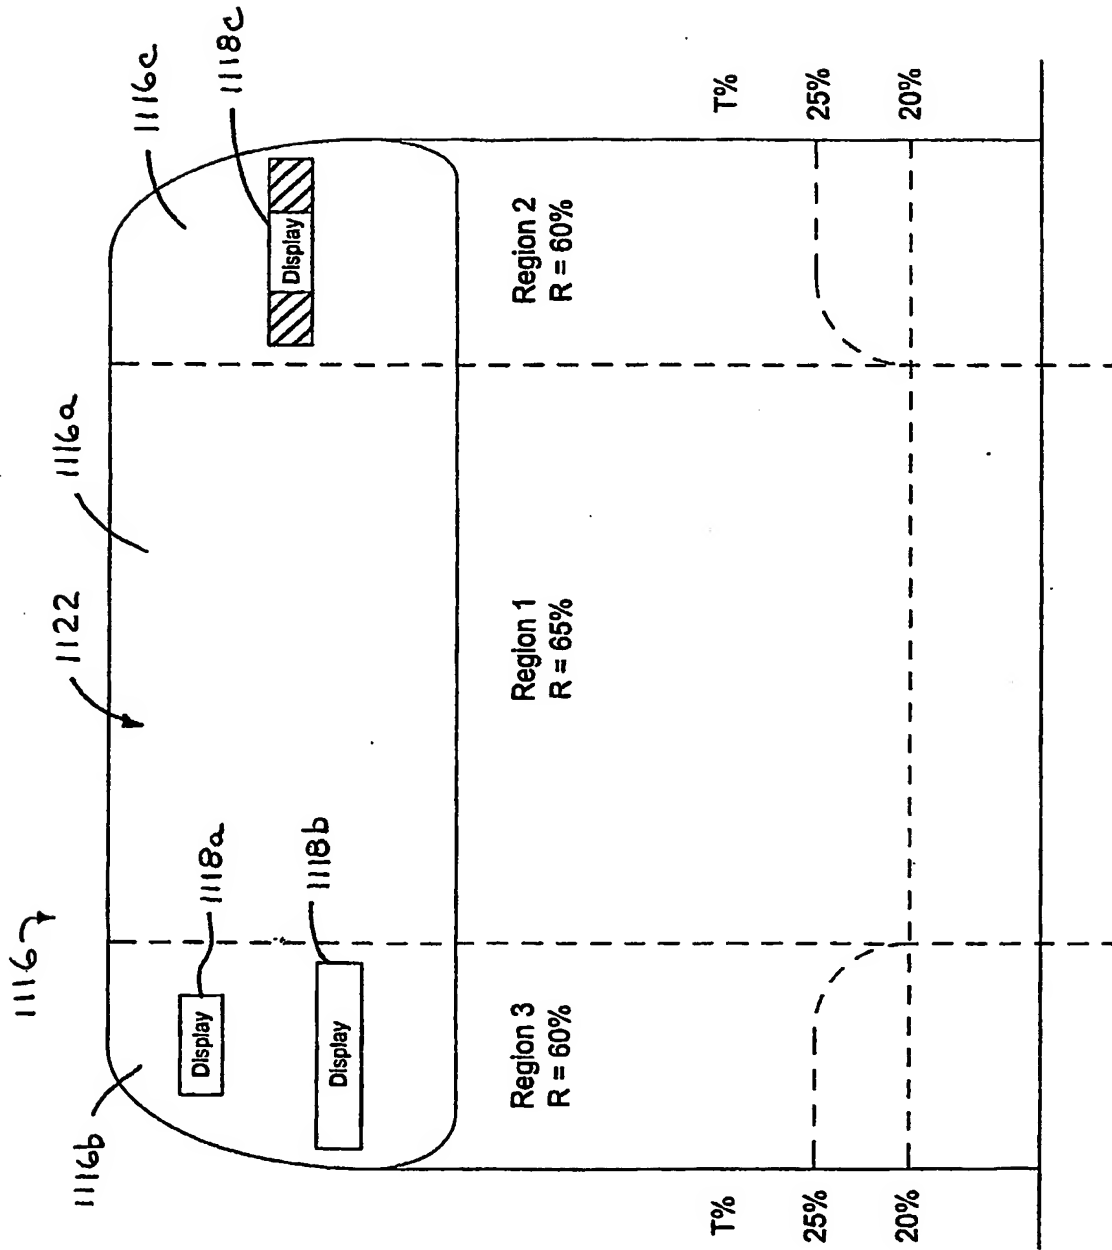


FIG. 18